


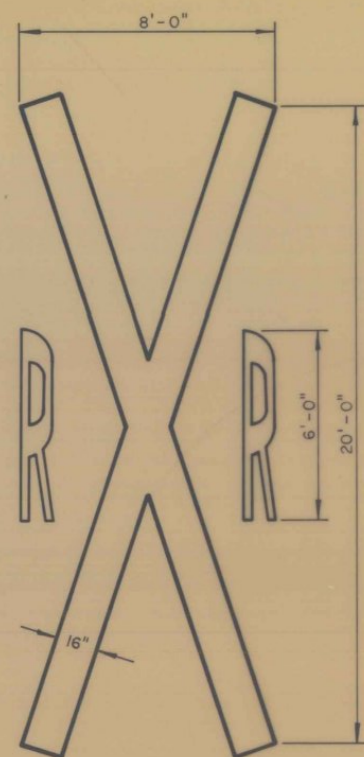


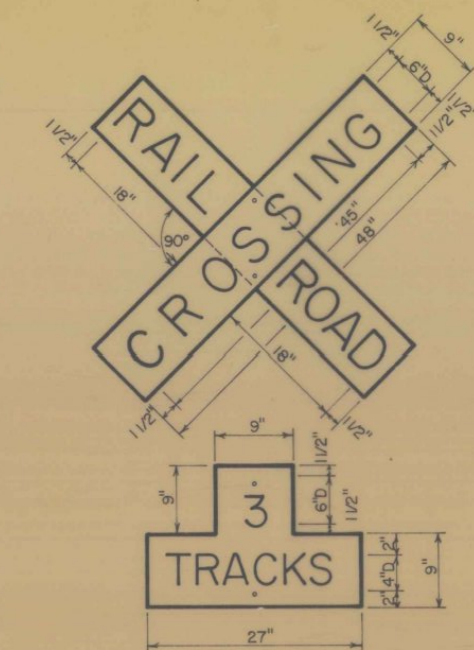

PAVEMENT MARKINGS

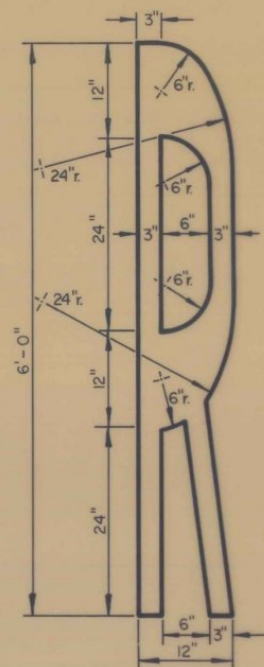


RAILROAD CROSSING SIGN (CROSSBUCK)

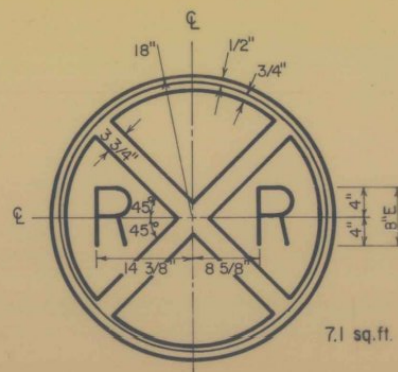


ADVANCE SIGN


SIGN MATERIAL -
CROSS-BUCKS SHALL BE EITHER 5/8" HIGH-DENSITY OVERLAY PLYWOOD OR 0.100 ALUMINUM W/SILVER OR WHITE ENCAPSULATED REFLECTIVE SHEETING. ADVANCE SIGN SHALL BE 0.125 ALUMINUM W/YELLOW REFLECTIVE SHEETING. MULTI-TRACK SIGN SHALL BE 0.06 ALUMINUM W/SILVER OR WHITE REFLECTIVE SHEETING. TEXT, STRIPES AND BORDERS SHALL BE EITHER BLACK PAINTED OR LETTERING FILM.

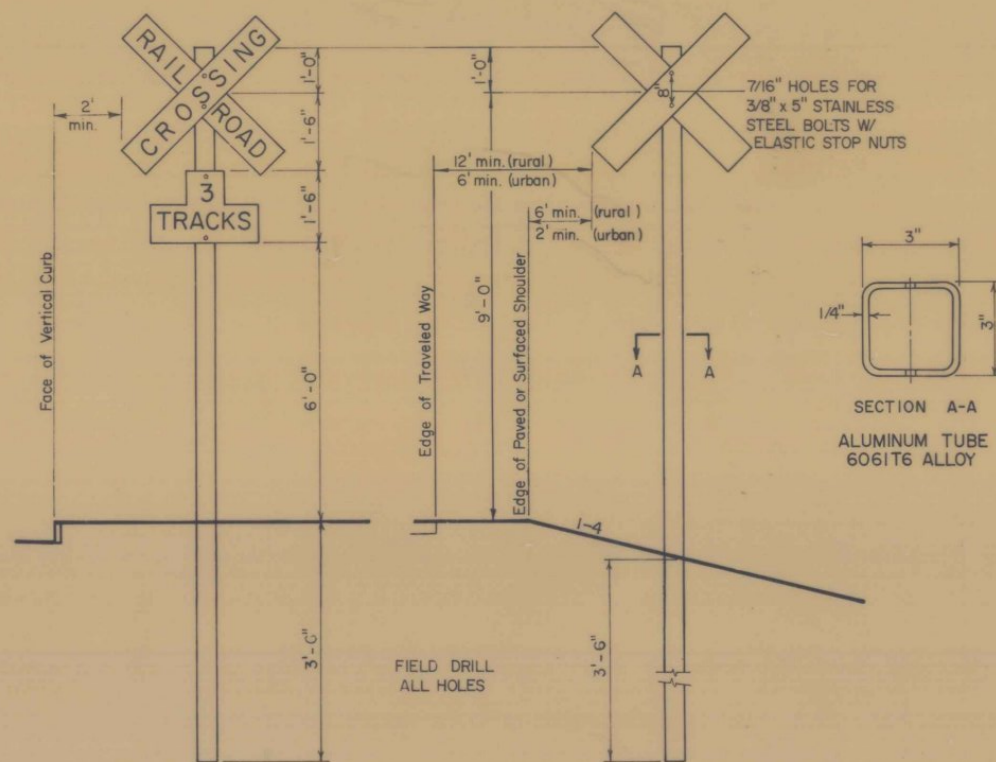

SECTION A-A
ALUMINUM TUBE
6061T6 ALLOY

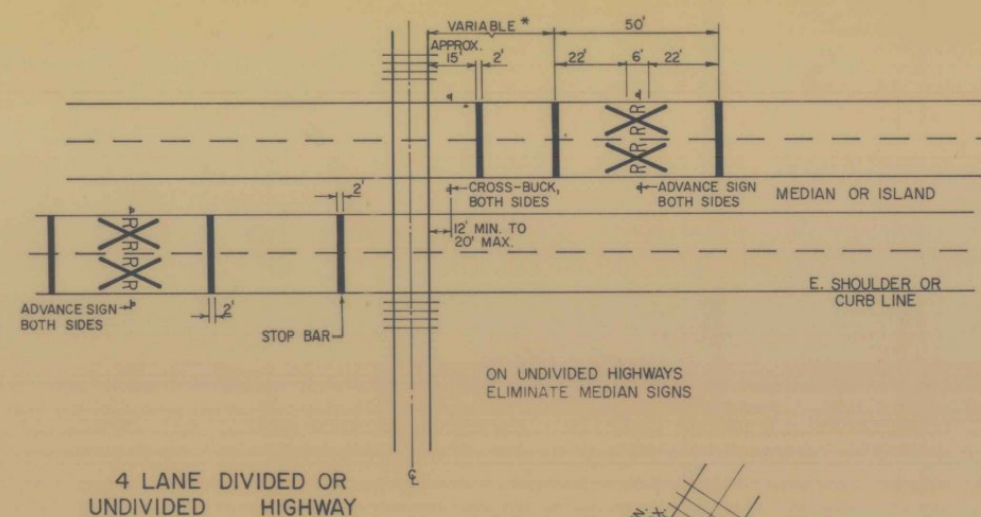

4 LANE DIVIDED OR
UNDIVIDED
HIGHWAY

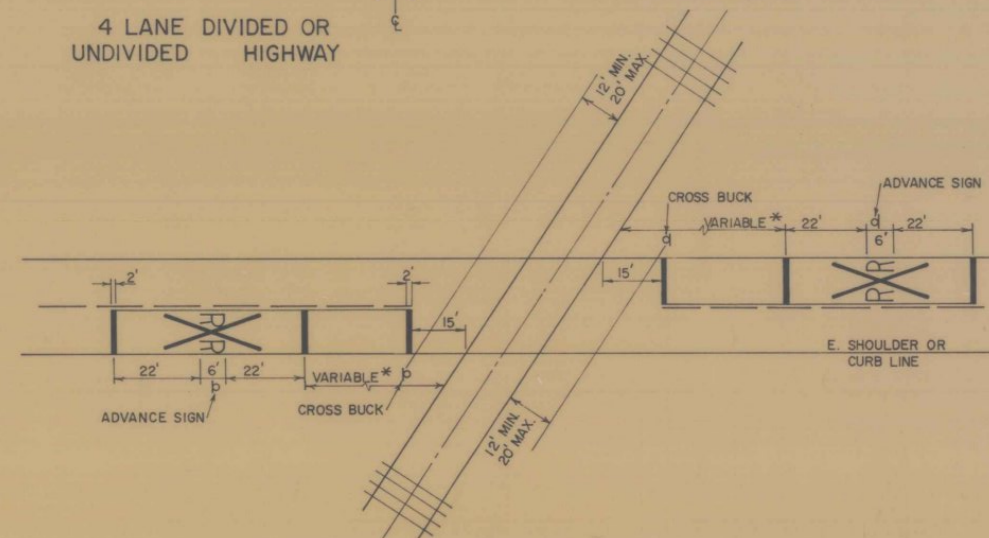

2 WAY TRAFFIC PAVED

ALSO APPLICABLE TO UNPAVED ROADS FOR
PLACEMENT OF CROSSBUCKS AND ADVANCE
SIGNS

GENERAL NOTES

1. Pavement Markings
These markings shall be placed, if physically feasible, on all paved approaches to railroad crossings, where there are signals and/or automatic gate and at all other crossings where the prevailing speed of highway traffic is 40 MPH or greater.
The markings shall also be placed at crossings where engineering studies indicate there is a significant potential conflict between vehicles and trains. At minor crossings or in urban areas, these markings may be omitted if engineering study indicates that other devices installed provide suitable protection. Such markings shall be white except for the no passing markings. This marking shall be centered opposite the Advance Warning Sign and as indicated above.
2. Cross-bucks
Where physically feasible and visible to approaching traffic, these signs shall be installed on the right-hand side of the roadway for each approach to the crossing.

3. Auxiliary Signs
A number of tracks signs shall be used where there are two or more tracks at the crossing.
- * 4. Advance Warning Sign
Railroad Advance Warning signs will be provided and located in accordance with Section 8B-3 of the MUTCD.

For post-hardware, anchors and erection information, refer to standard sheet E-24A.

MATERIALS:
REFER TO SPECIAL SPECIFICATION FOR REFLECTORIZED
PAVEMENT MARKINGS

REVISIONS & CORRECTIONS

MARCH 26, 1979 PAVEMENT MARKINGS REVISED
SEPT. 4, 1979-NOTE 4 MODIFIED
APRIL 28, 1980-NOTE 4 MODIFIED. EMBEDED
DETAILS FOR CROSS-BUCK
SUPPORT REVISED.

APPROVED

DATE

8/17/77

S. J. Gage
CHIEF ENGINEER

ROMM
CHIEF OF DESIGN

Loren L. Jones
HIGHWAY ENGINEER

RAILROAD CROSSING SIGNS AND PAVEMENT MARKINGS



STANDARD
E-45