
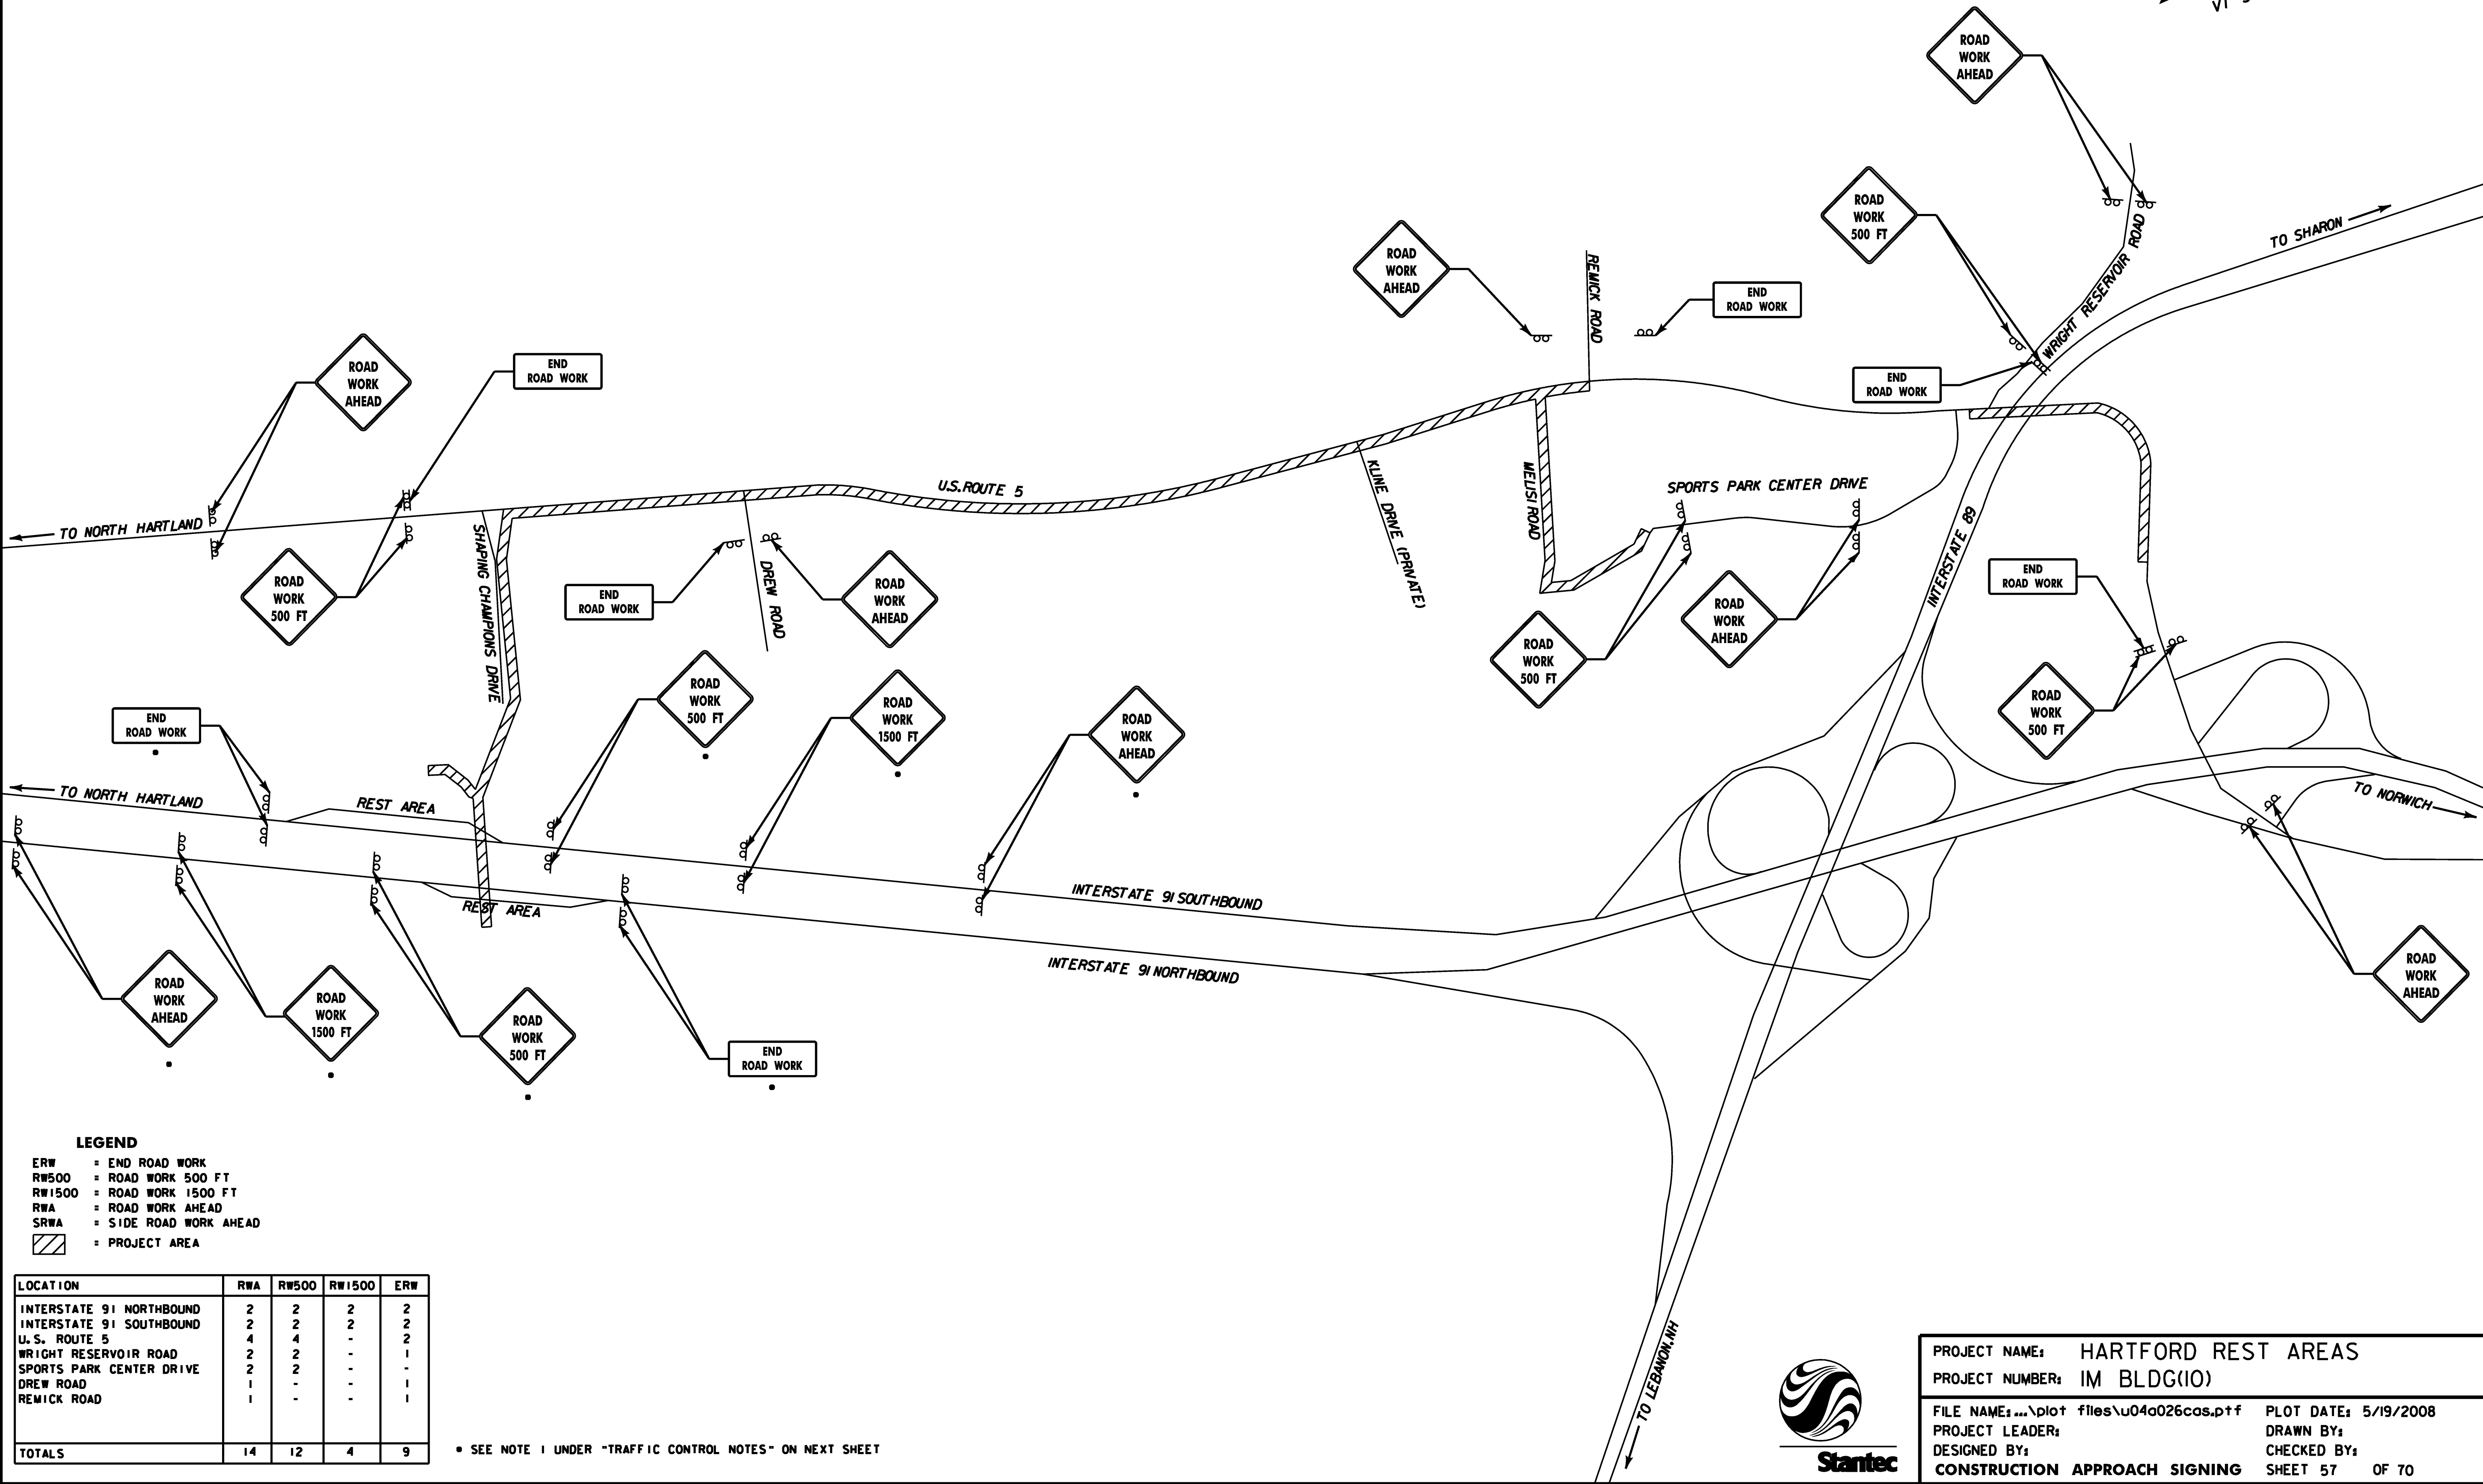


CONSTRUCTION APPROACH SIGNING
NOT TO SCALE
SEE TRAFFIC CONTROL NOTES FOR ADDITIONAL DETAILS

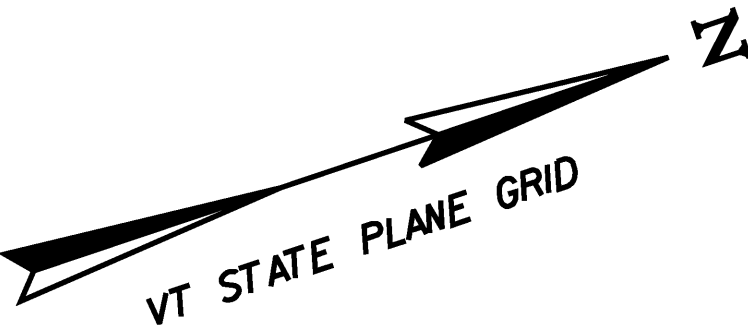

LEGEND

- ERW = END ROAD WORK
- RW500 = ROAD WORK 500 FT
- RW1500 = ROAD WORK 1500 FT
- RWA = ROAD WORK AHEAD
- SRWA = SIDE ROAD WORK AHEAD
- [Hatched Box] = PROJECT AREA

LOCATION	RWA	RW500	RW1500	ERW
INTERSTATE 91 NORTHBOUND	2	2	2	2
INTERSTATE 91 SOUTHBOUND	2	2	2	2
U.S. ROUTE 5	4	4	-	2
WRIGHT RESERVOIR ROAD	2	2	-	1
SPORTS PARK CENTER DRIVE	2	2	-	-
DREW ROAD	1	-	-	1
REMIK ROAD	1	-	-	1
TOTALS	14	12	4	9

• SEE NOTE 1 UNDER "TRAFFIC CONTROL NOTES" ON NEXT SHEET



PROJECT NAME:	HARTFORD REST AREAS
PROJECT NUMBER:	IM BLDG(10)
FILE NAME:	...\\plot files\\u04a026cas.pxf
PROJECT LEADER:	DRAWN BY:
DESIGNED BY:	CHECKED BY:
CONSTRUCTION APPROACH SIGNING	SHEET 57 OF 70

PLOT DATE: 5/19/2008