

EXIT 3 - RAMP D
SOUTHBOUND OFF RAMP

SEE STANDARDS E-191, E-192 AND E-193
FOR PAVEMENT MARKING GUIDELINES

TEMPORARY 6" WHITE LINE, PAINT
DURABLE 6" WHITE LINE, RECESSED

312+00 TO 315+27 SOLID LT
314+34 TO 315+27 DASHED RT
1183+52 TO 1185+90 DASHED LT
1185+90 TO 1190+80 DOTTED LT

TEMPORARY 6" YELLOW LINE, PAINT
DURABLE 6" YELLOW LINE, RECESSED

312+00 TO 313+13 SOLID RT

TEMPORARY 12" WHITE LINE, PAINT
DURABLE 12" WHITE LINE, RECESSED

313+13 TO 313+93 SOLID RT
313+13 TO 313+93 SOLID RT (GORE STRIPES)
1181+39 TO 1182+62 SOLID LT

REMOVAL AND DISPOSAL OF GUARDRAIL

1183+60.0 TO 1188+30.0 LT

STEEL BEAM GUARDRAIL, GALVANIZED

1183+60.0 TO 1188+60.0 LT

ANCHOR FOR STEEL BEAM RAIL

1183+60.0 LT

1186+62.0 LT

1188+60.0 LT

REHAB. DROP INLETS, CATCH BASINS,
OR MANHOLES, CLASS I, CLASS II OR CLASS III

1183+89 LT (DI)

TREATED TIMBER CURB

1183+90 TO 1186+62 LT

12" CSP .064

1187+35 TO 1188+95 LT

DELINEATORS

REFER TO STANDARDS E-197 AND
E-198 FOR PLACEMENT GUIDELINES


REMOVING SIGNS

AS SHOWN TYPE A - 21

AS SHOWN TYPE B - 2

ERECTING SALVAGED SIGNS

AS SHOWN TYPE B - 2

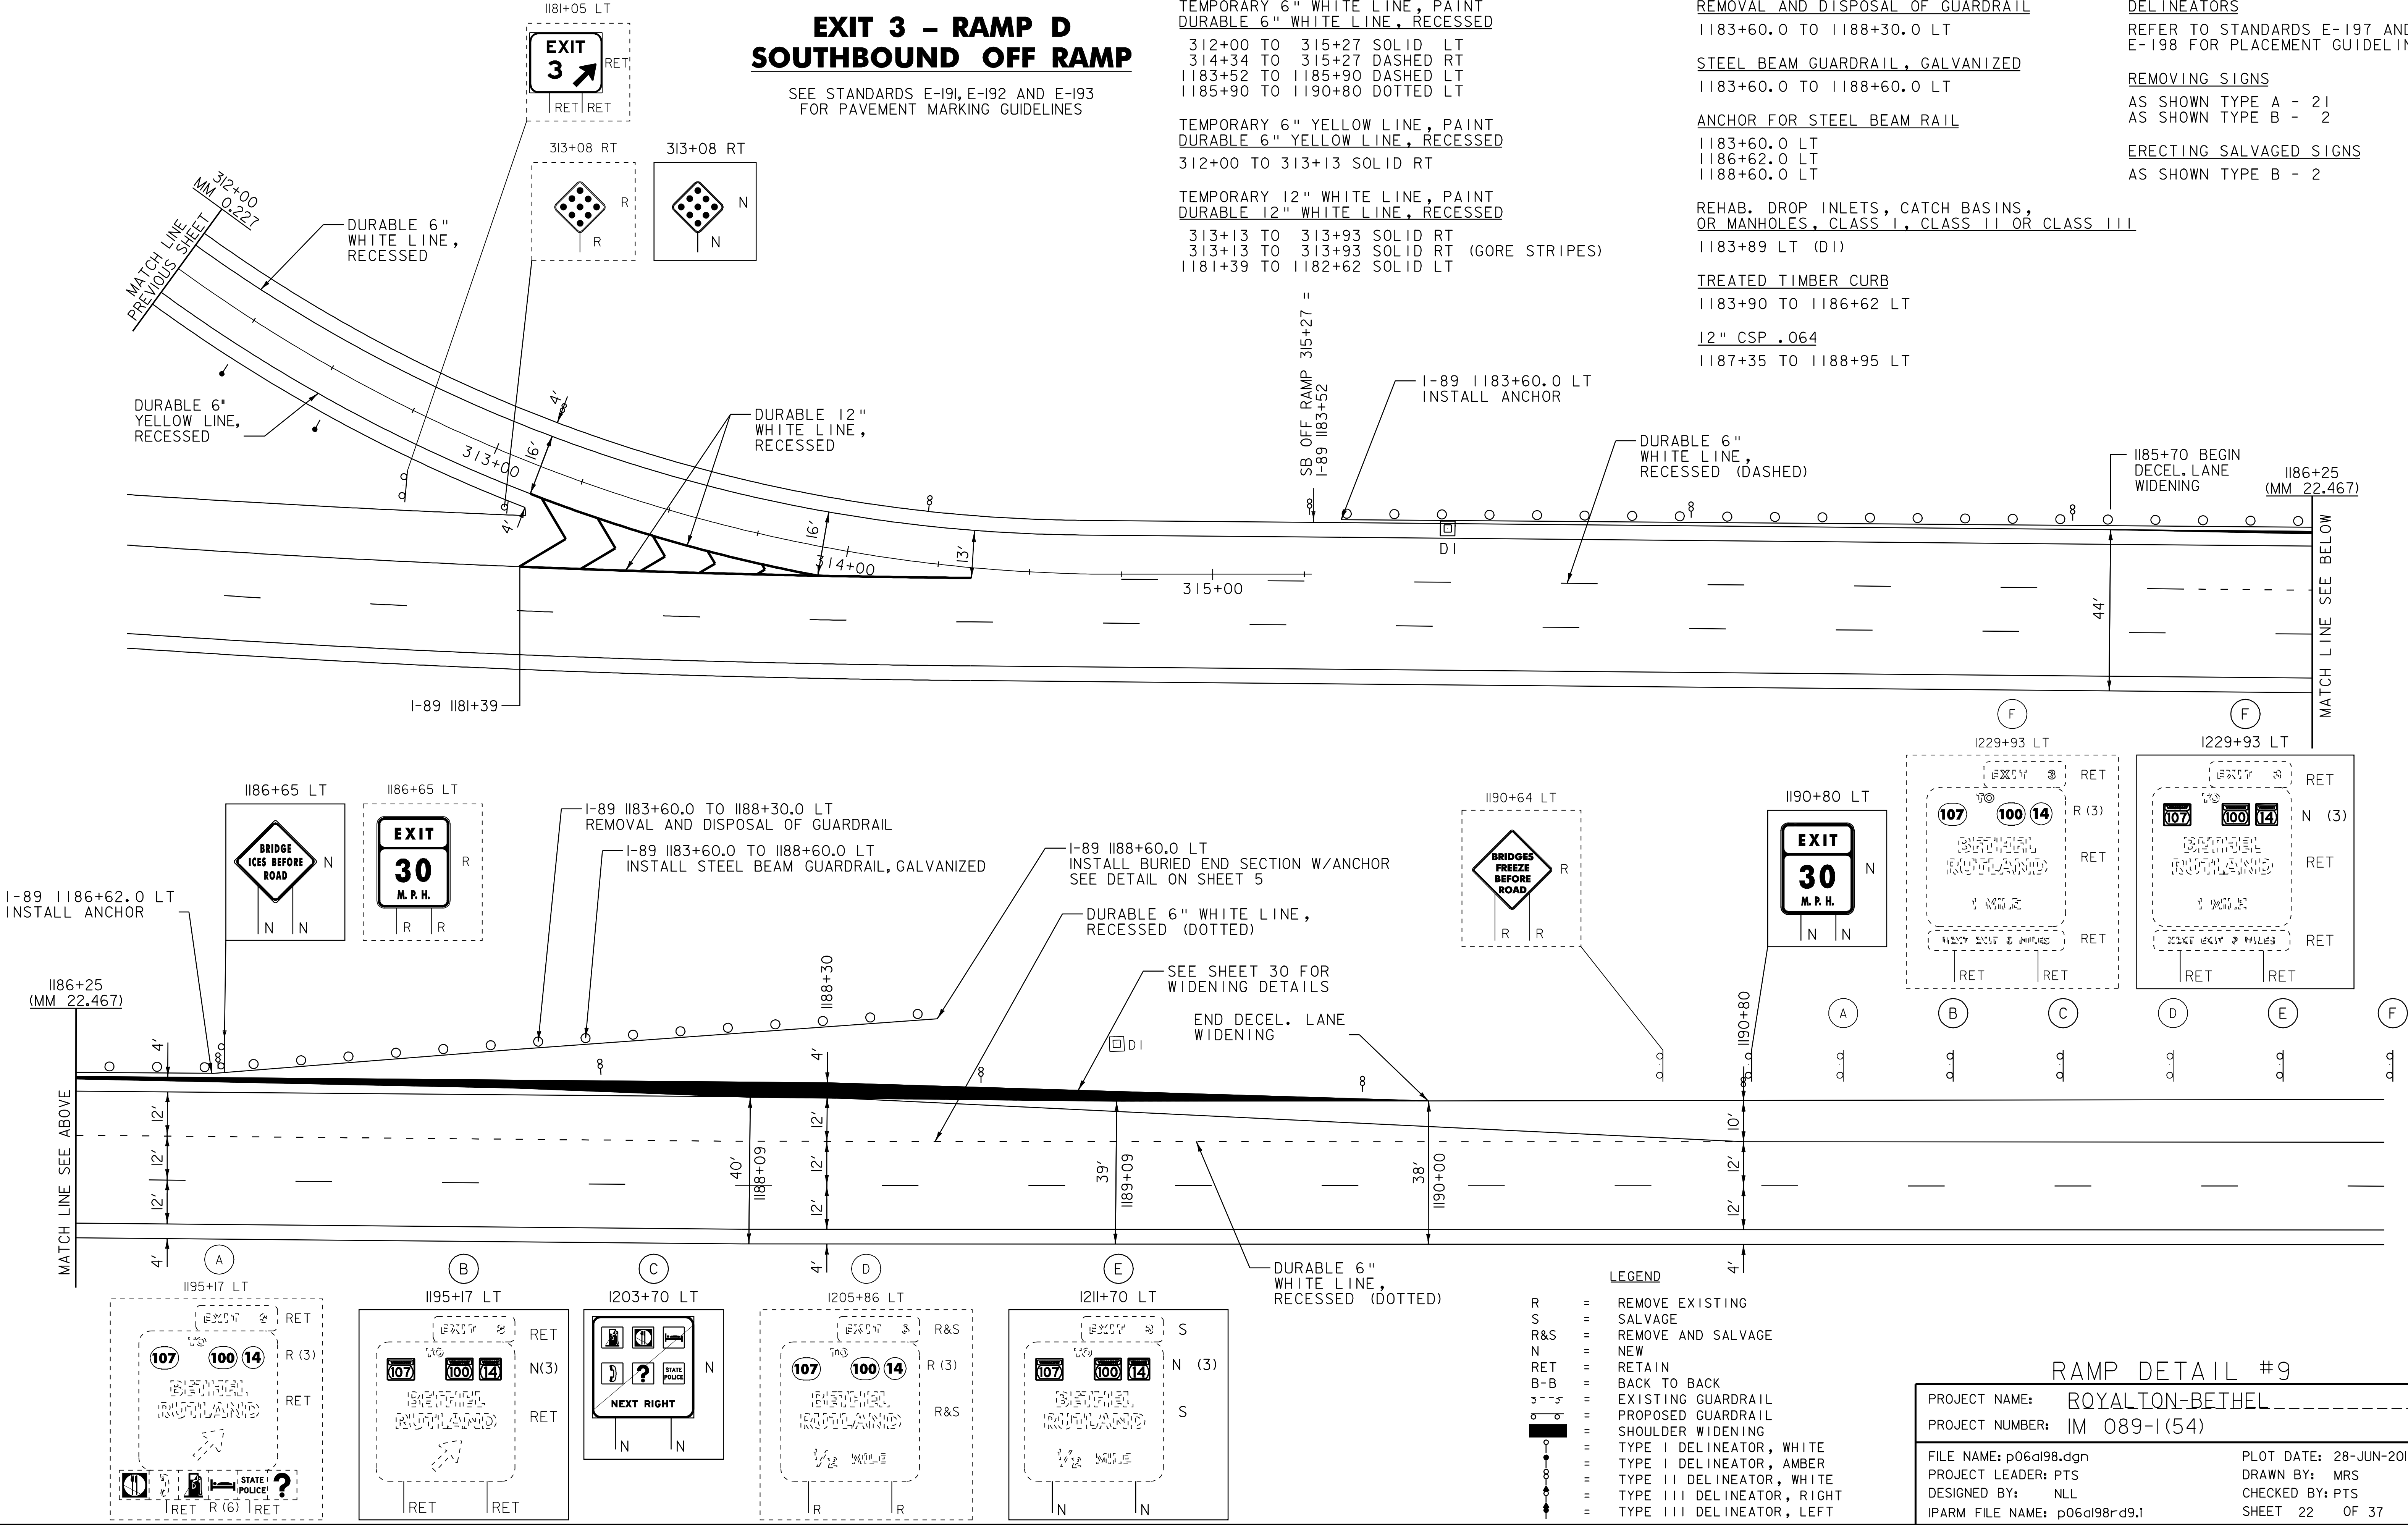

RAMP DETAIL #9

PROJECT NAME: ROYALTON-BETHEL
PROJECT NUMBER: IM 089-1(54)

FILE NAME: p06a198.dgn
PROJECT LEADER: PTS
DESIGNED BY: NULL
IPARM FILE NAME: p06a198-rd.1
PLOT DATE: 28-JUN-2010 15:12
DRAWN BY: MRS
CHECKED BY: PTS
SHEET 22 OF 37