



MS # 536

US 7 NORTH
US 2 WEST



VT 127 SOUTH

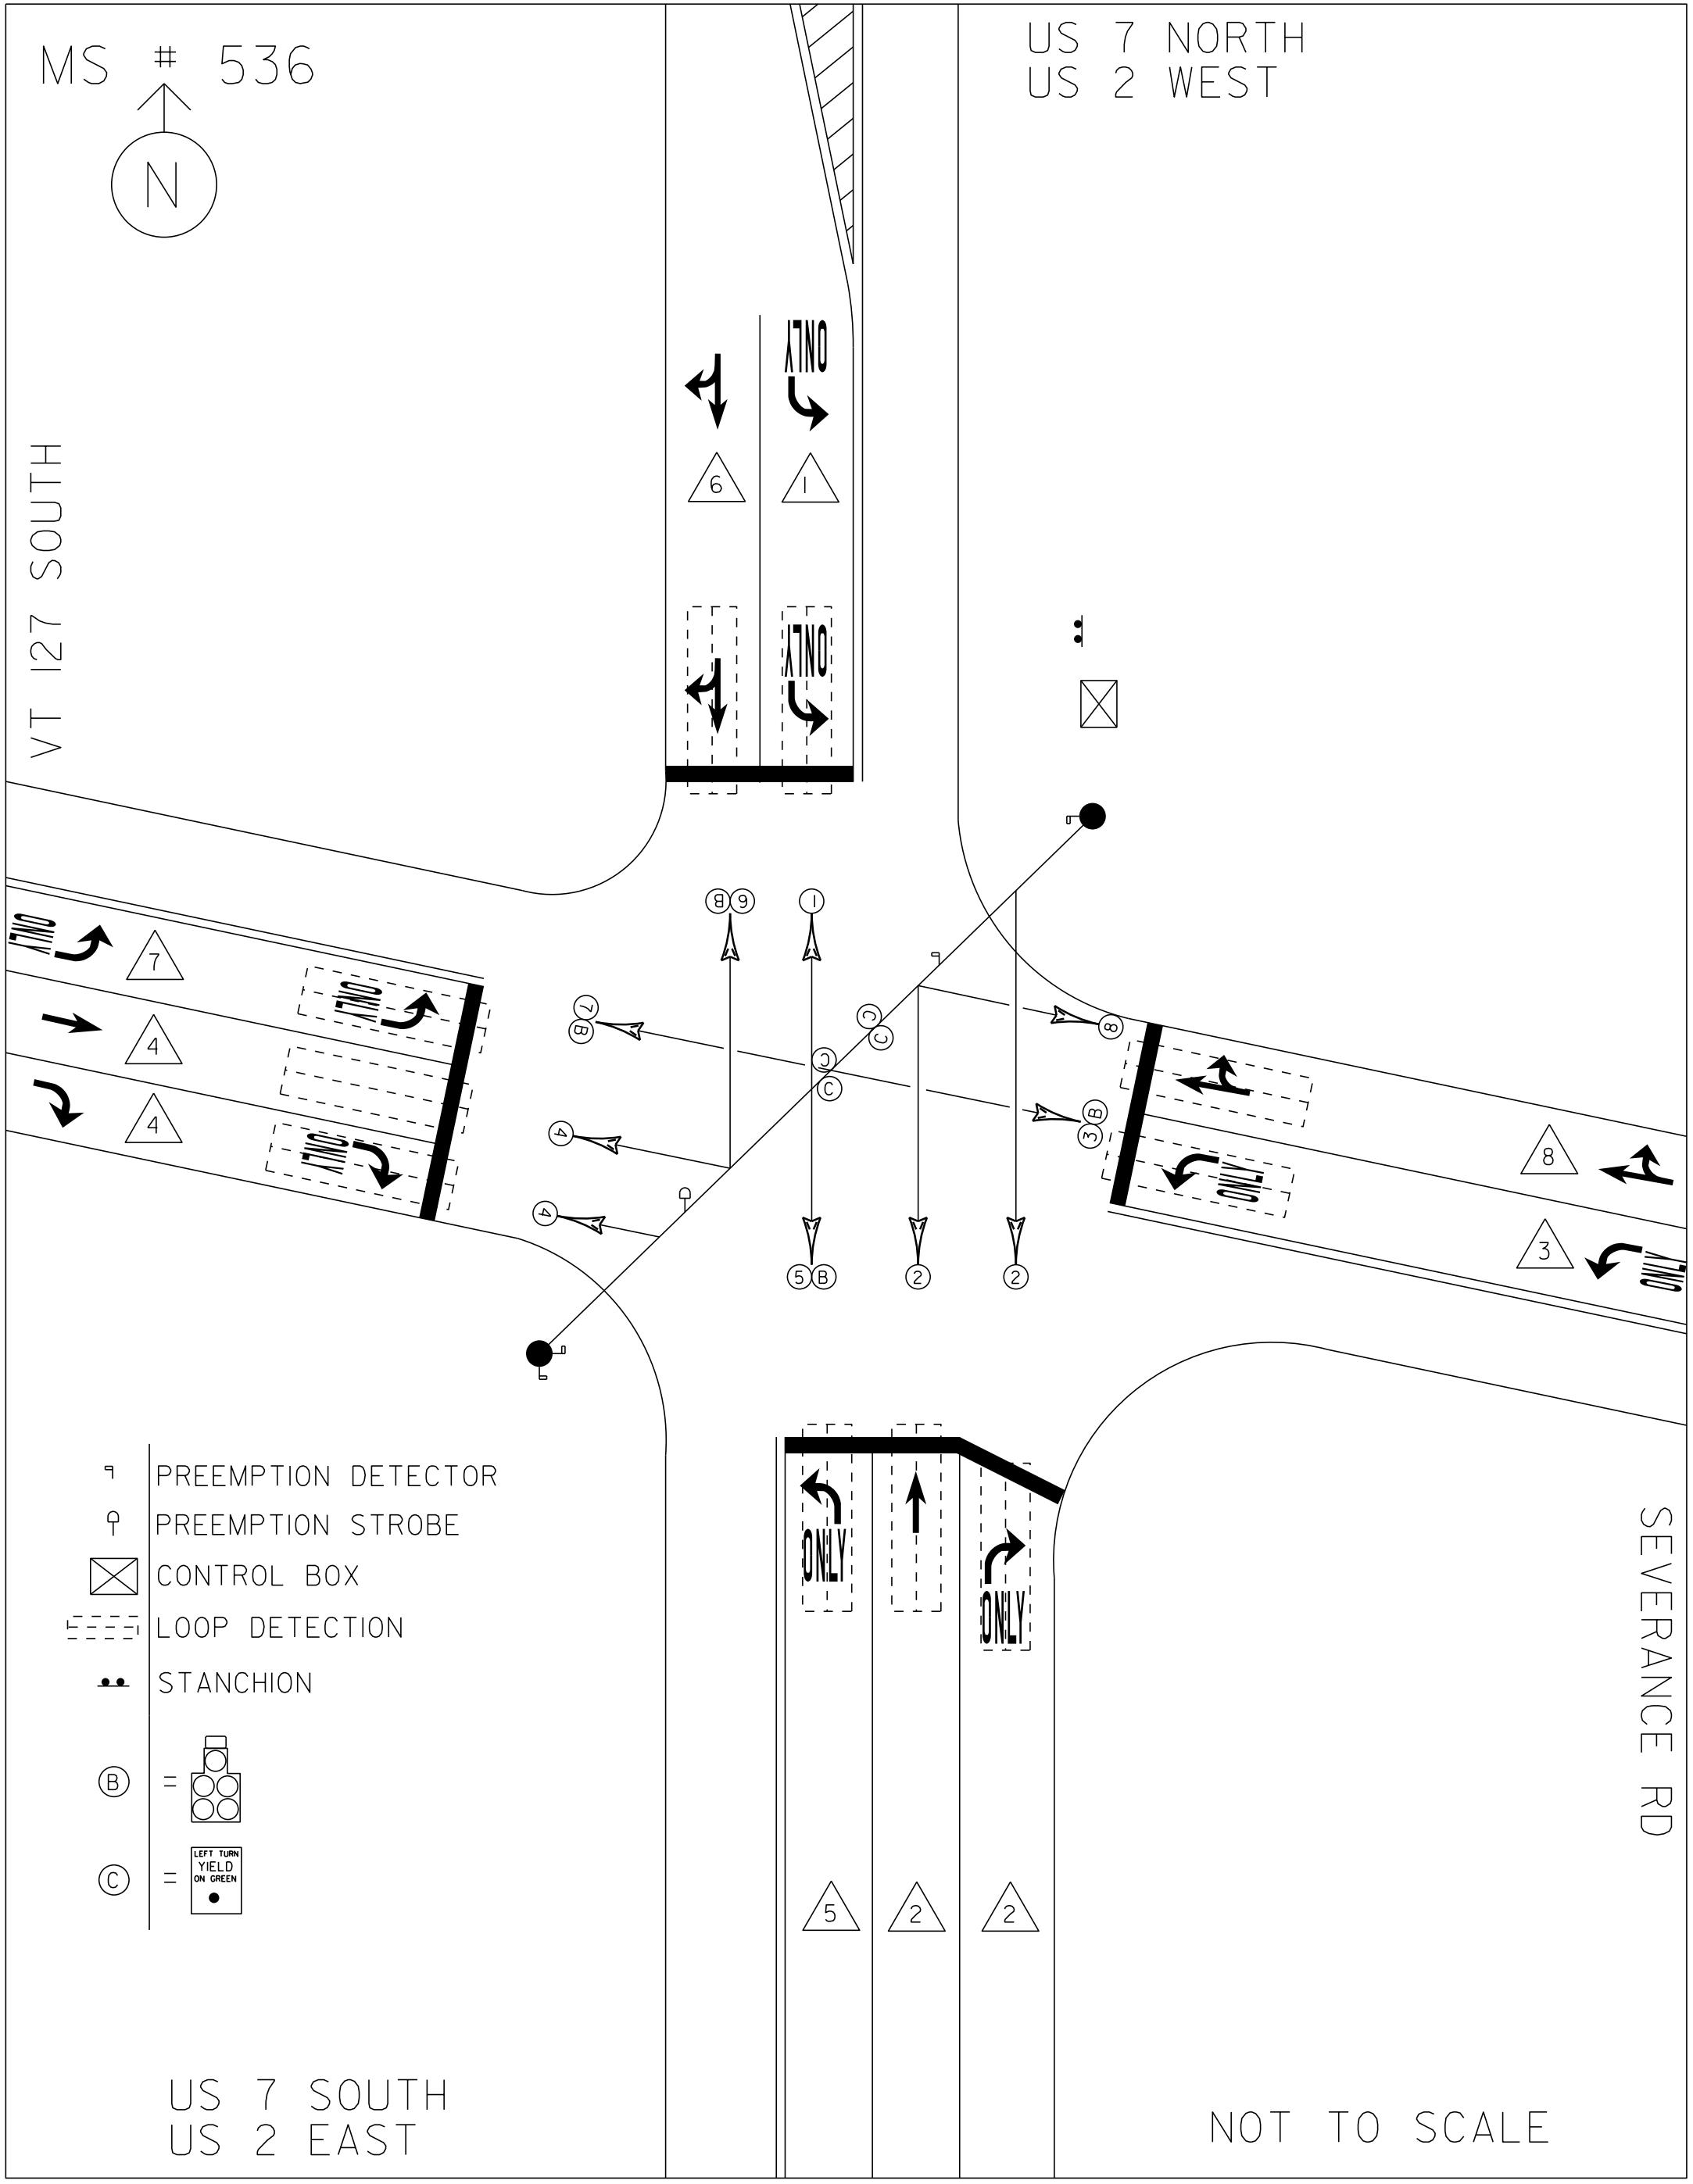

- PREEMPTION DETECTOR
- PREEMPTION STROBE
- CONTROL BOX
- LOOP DETECTION
- STANCHION
- (B) = [Traffic Signal Diagram]
- (C) = [Left Turn Yield on Green Sign]

US 7 SOUTH
US 2 EAST

SEVERANCE RD


NOT TO SCALE

MS # 536


N

US 7 NORTH
US 2 WEST

VT 127 SOUTH

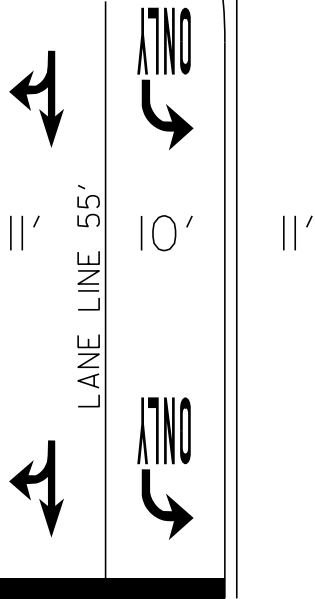


STOP BAR 22'

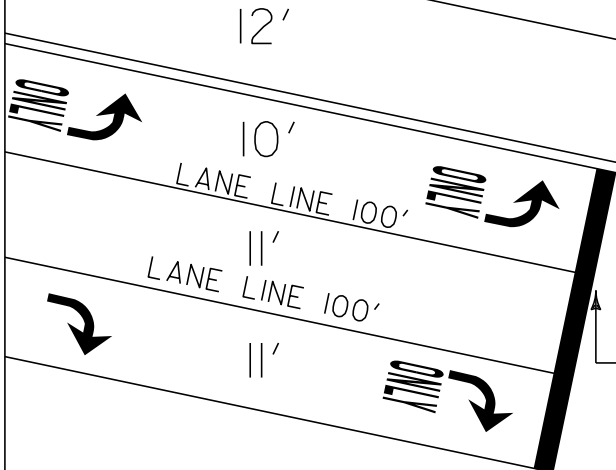

STOP BAR 33'


STOP BAR 24'

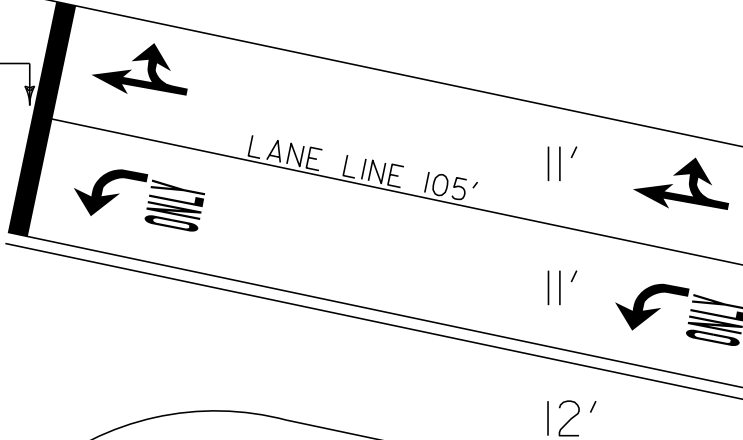

12'

STOP BAR 22'









STOP BAR 18'

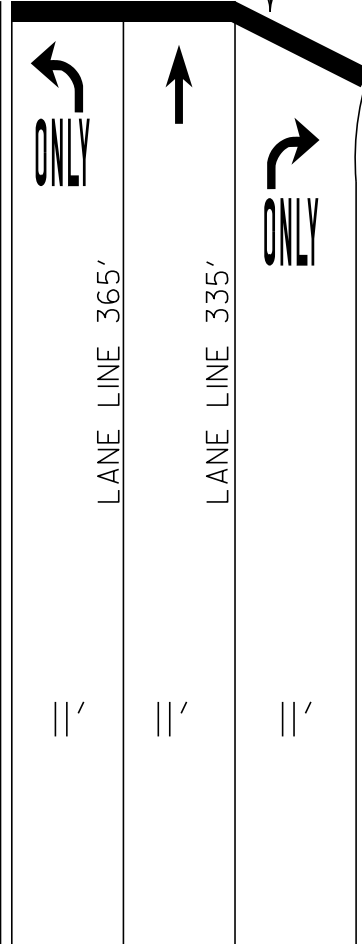


SEVERANCE RD

US 7 SOUTH
US 2 EAST

NOT TO SCALE

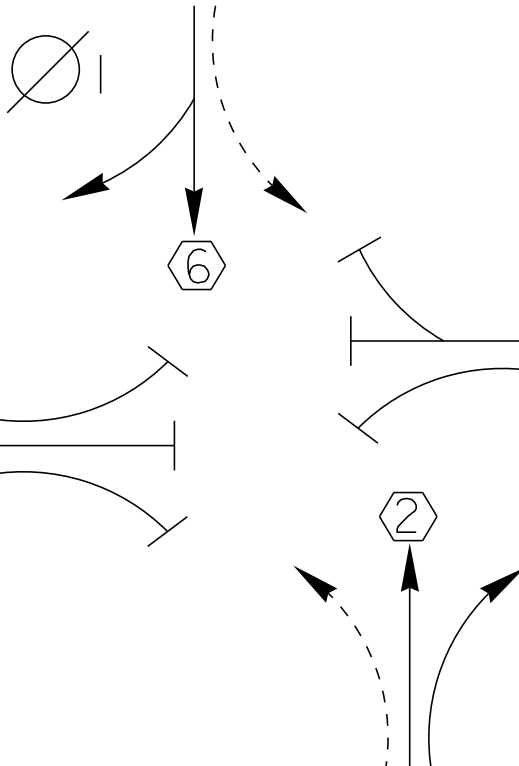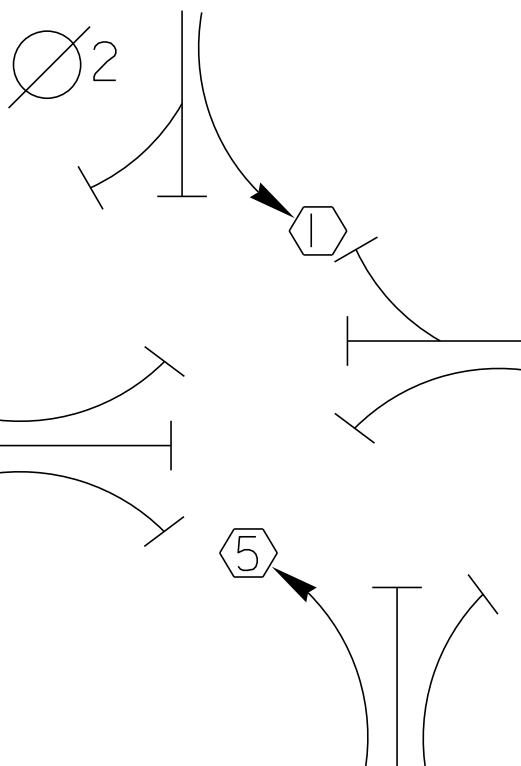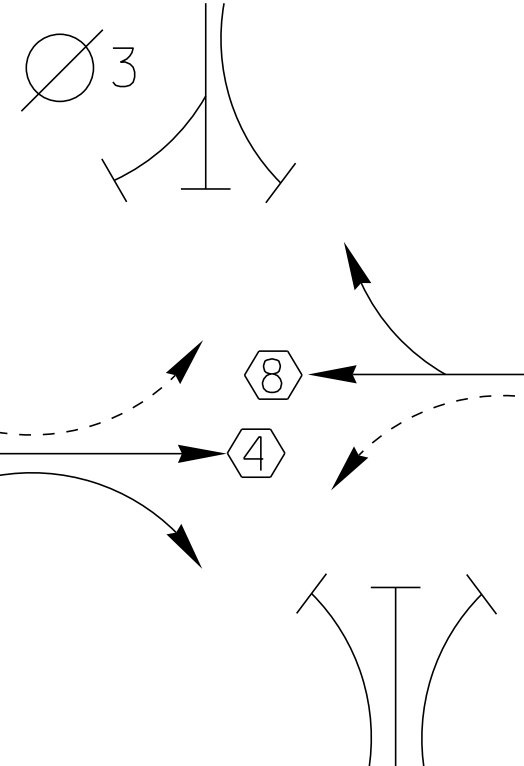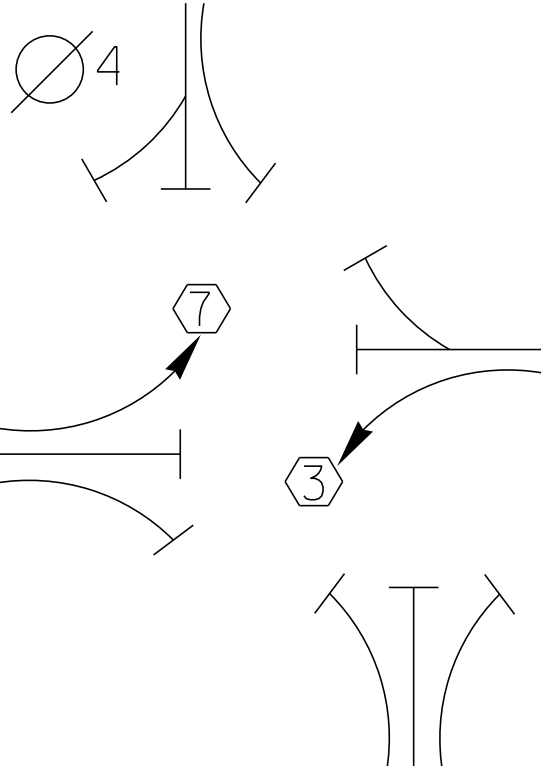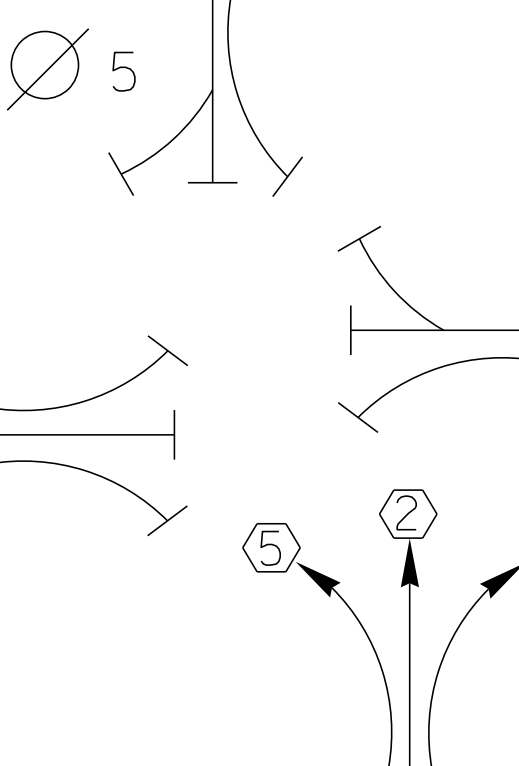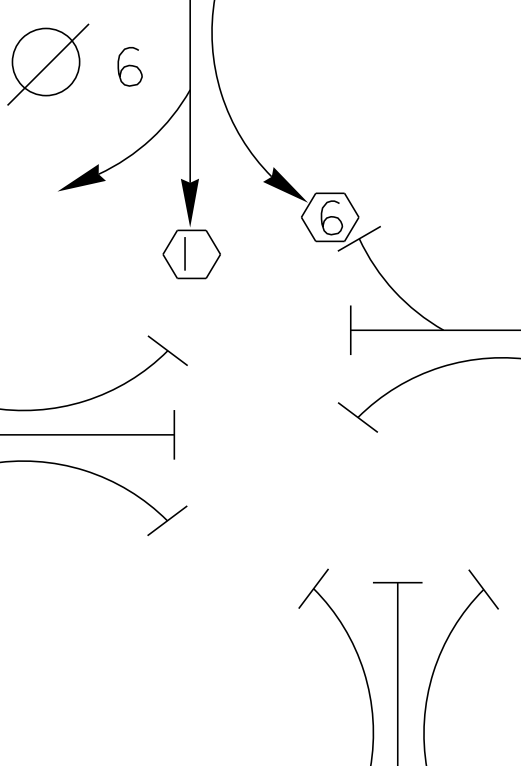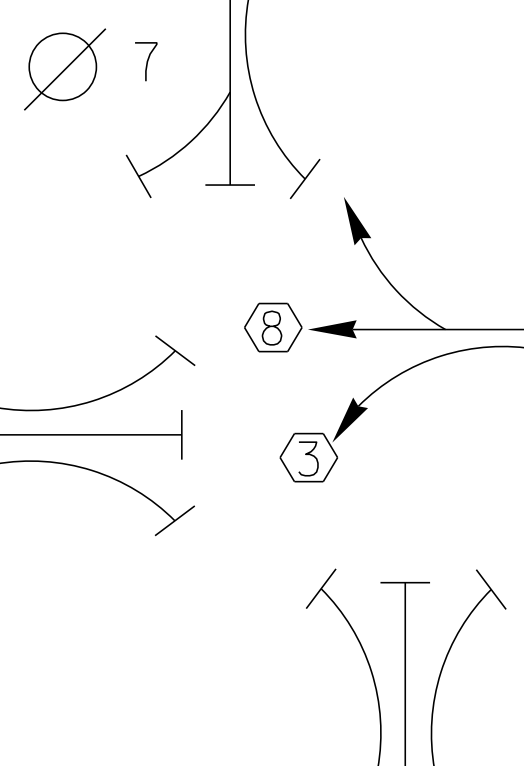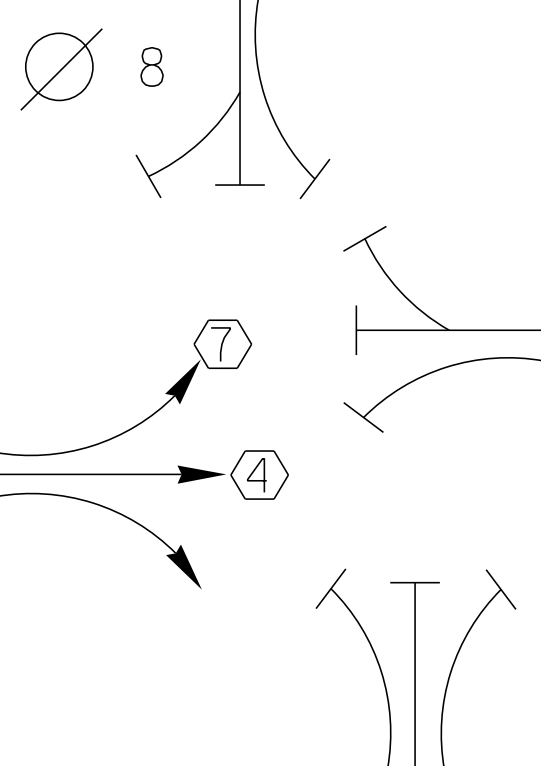D I A G R A M 				
TIMING	G = Y =	G = Y =	G = Y =	G = Y =
D I A G R A M				
TIMING	G = Y =	G = Y =	G = Y =	G = Y =

 PROTECTED
TURNS

 PERMITTED
TURNS
PEDESTRIAN

CYCLE LENGTH, C= _____ S



1070
24 05
02.00

DANGER

115 VOLTS A.C.


WARNING

DO NOT OPERATE
CABINET WITHOUT
CONFLICT MONITOR UNIT



CONNECT
EARTH GROUND
TO THE
CABINET



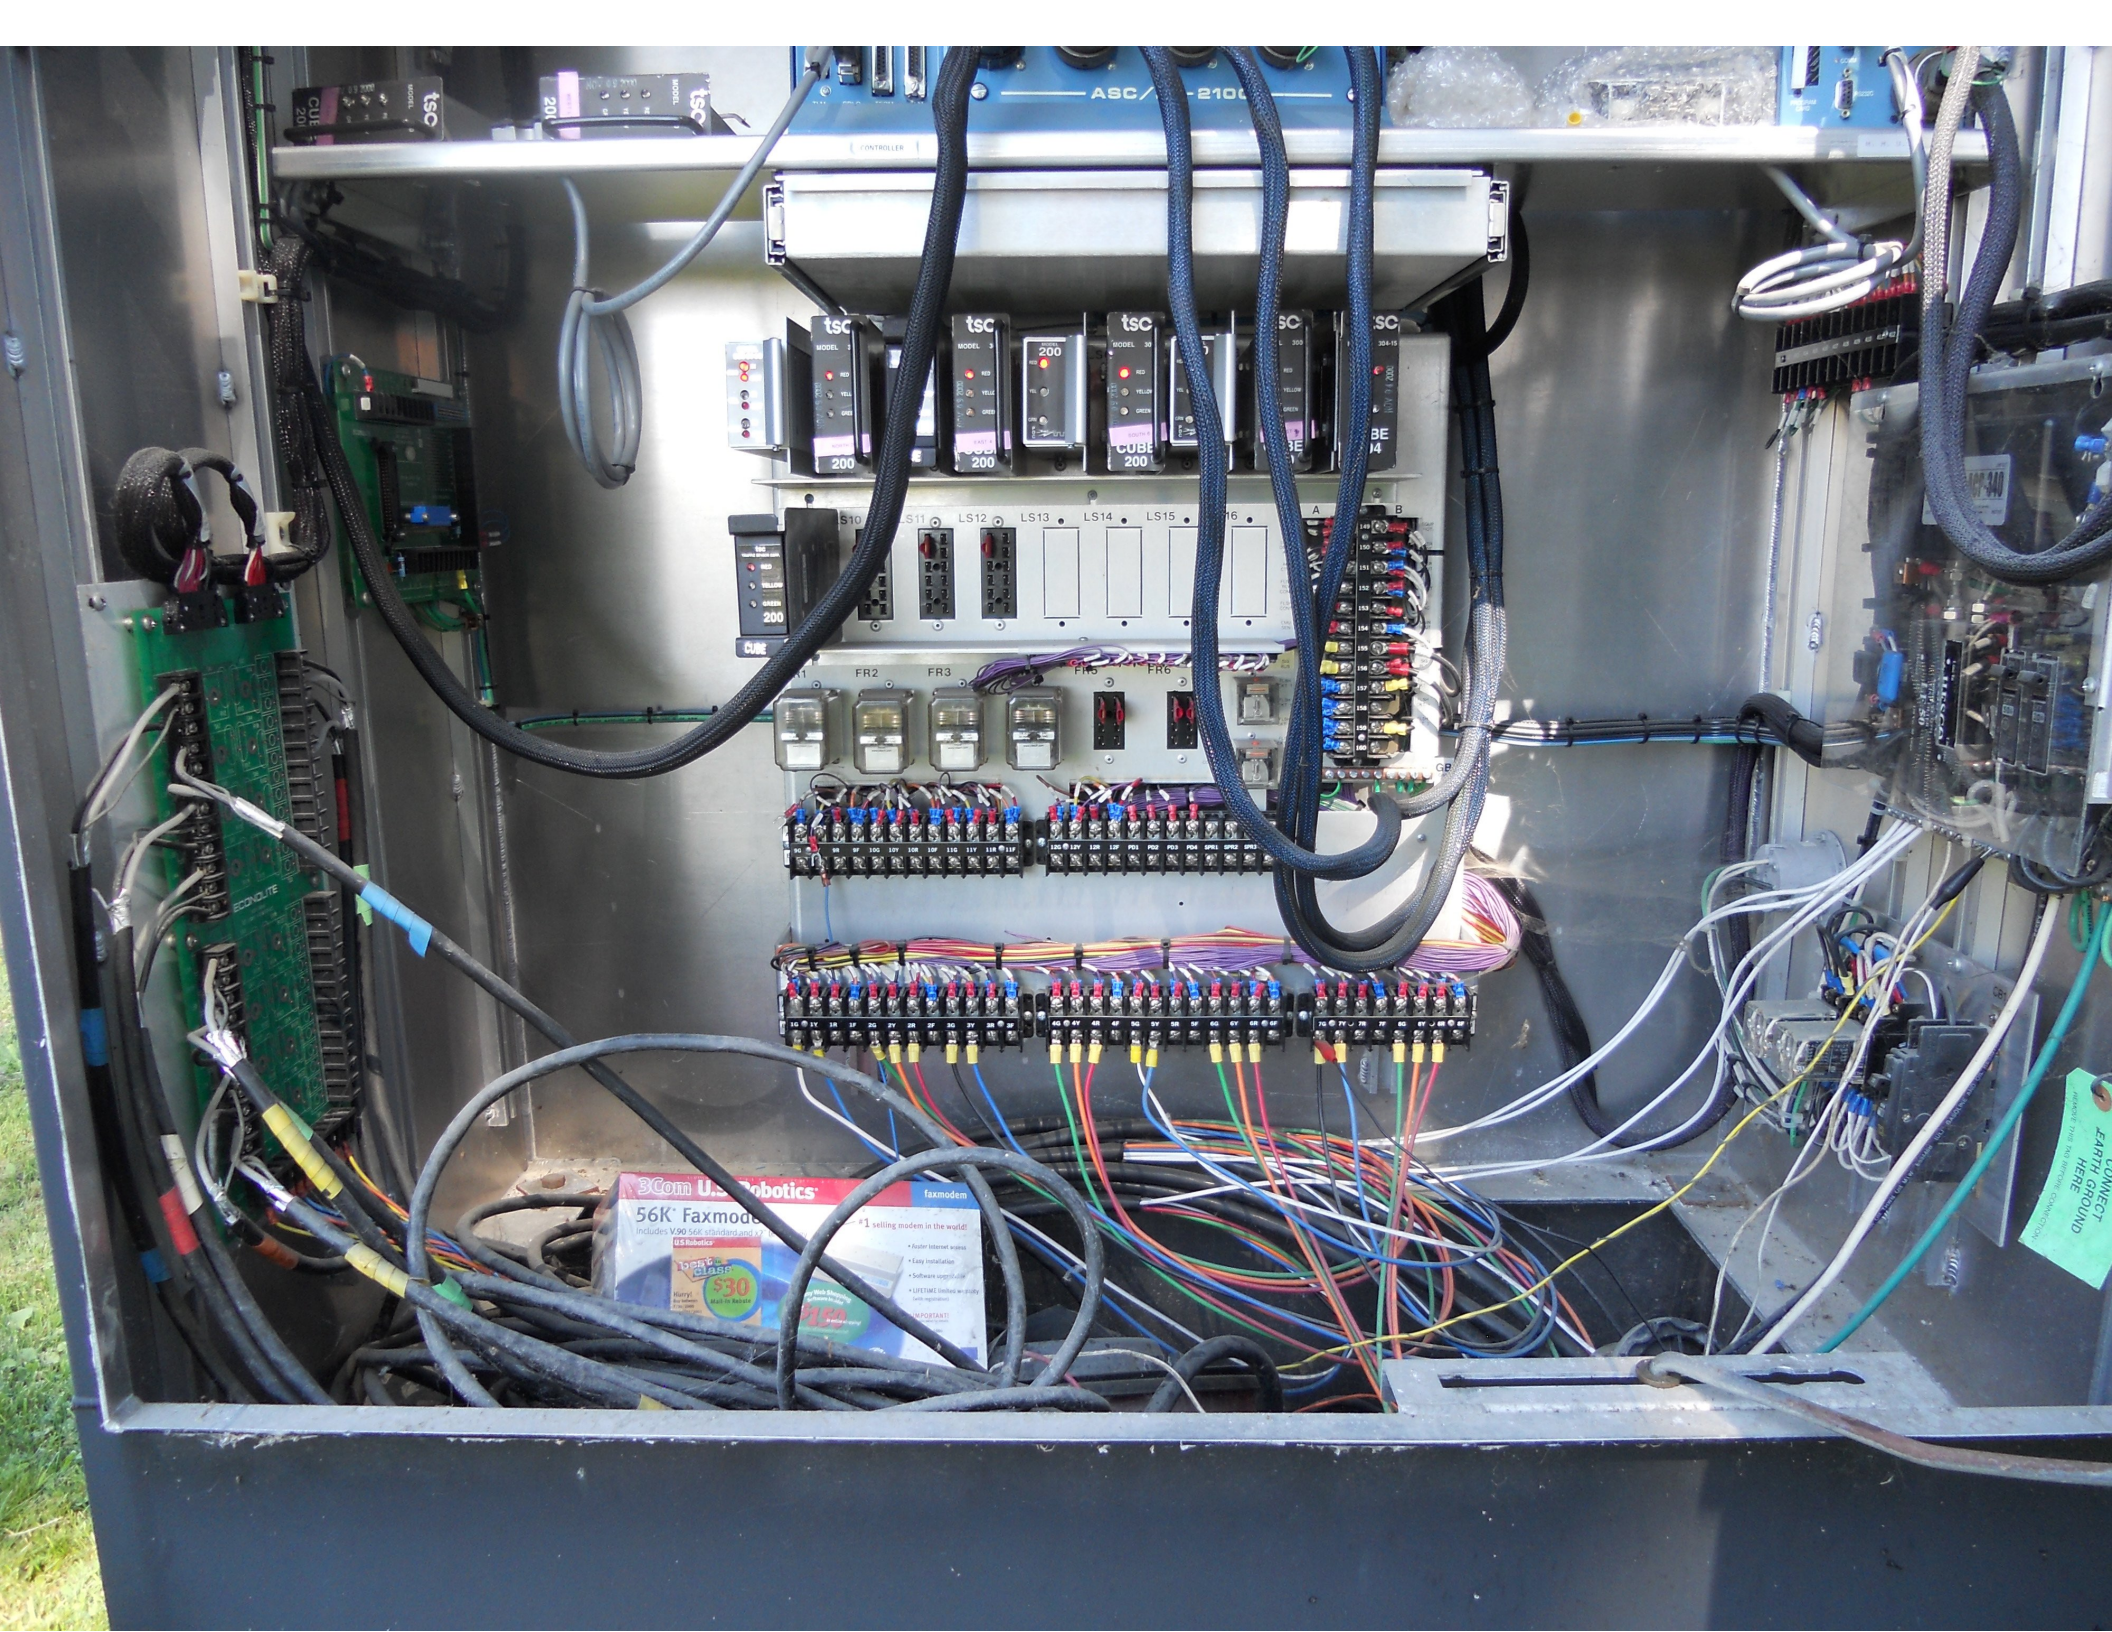



BUS INTERFACE UNIT

POWER ON

TRANSMIT

VALID DATA

PORT

ECONOLITE

MODEL C

ECONOLITE

VEHICLE DETECTOR

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

MODEL C

ECONOLITE

VEHICLE DETECTOR

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

MODEL C

ECONOLITE

VEHICLE DETECTOR

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

MODEL C

ECONOLITE

VEHICLE DETECTOR

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

MODEL C

ECONOLITE

VEHICLE DETECTOR

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

CHANN

FUNC

B. I. U.
DETECTOR
1

L1

L2

L3

L4

L5

L6

L7

L8

L9

L10

L11

L12

L13

L14


L15

L16

NOT
USED

NOT
USED

NOT
USED

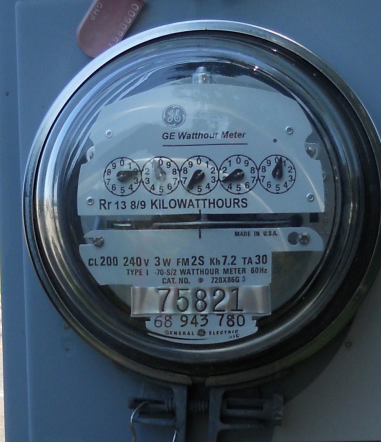


TMM2212R
MAIN BUS (BARRIL) / CAPACIDAD DE LA BARRA PRINCIPAL
200 AMPS MAX.
120/240V 3W/4W
1PHASE-3W/4W
BREAKER HANDLE IN RED POSITION INDICATES BREAKER IS TRIPPED
TO RESTART SERVICE, MOVE HANDLE TO THE EXTREMITY LEFT. DO NOT TRY TO
LA MANEJALA DEL INTERRUPTOR EN LA POSICION AMARILLA, INDICA QUE EL
INTERRUPTOR SE HA TRIPADO. PARA REANUDAR EL SERVICIO, MUEVA
EL MANEJALA AL EXTREMITY IZQUIERDA.
BARRIL / BARRIL 200A / DATA REV. C

Hazard of Electrical Shock or Burn
Turn OFF power supplying this
equipment before working inside.





LEFT TURN
YIELD
ON GREEN



BLAKELY RD









LEFT TURN
YIELD
ON GREEN

LEFT TURN
YIELD
ON GREEN

LEGACY ROAD
LIMIT
25,000
POUNDS





ROOSEVELT HWY

LEGAL LOAD
LIMIT
24,000
POUNDS











SEVERANCE RD









LEFT TURN
YIELD
ON GREEN

LEFT TURN
YIELD
ON GREEN







14 M/307
48/51304

.....

[illegible]

	Week of Year																	
Prog	1 1	2 1	3 1	4 1	5 1	6 1	7 1	8 1	9 1	10 1	11 1	12 1	13 1	14 1	15 1	16 1	17 1	18 1
Prog	19 1	20 1	21 1	22 1	23 1	24 1	25 1	26 1	27 1	28 1	29 1	30 1	31 1	32 1	33 1	34 1	35 1	36 1
Prog	37 1	38 1	39 1	40 1	41 1	42 1	43 1	44 1	45 1	46 1	47 1	48 1	49 1	50 1	51 1	52 1	53 1	

NIC Program Steps

Step	Program	Step Begins	Pattern	Override
------	---------	-------------	---------	----------

TOD Program Steps

Step 1 Program 1 Step Begins 0600

Flash.	Dimming Enable.
Red Rest	Alt Veh Extension
Spare 5.	Det Log Enable.
Spare 3.	Spare 4
Type 0 Dly Enable. . .	Spare 2
Det Diag Plan. . . . 0	

	Phase Number											
	1	2	3	4	5	6	7	8	9	10	11	12
Max 2 Enable	.	X	X	X	.	X	X	X	.	.	.	.
Max 3 Enable	.	.	.	.	.	.	.	.	.	.	.	.
Veh Recall	.	.	.	.	.	.	.	.	.	.	.	.
Veh Max Recall	.	.	.	.	.	.	.	.	.	.	.	.
Ped Recall	.	.	.	.	.	.	.	.	.	.	.	.
Cond Service Inhibit.	.	.	.	.	.	.	.	.	.	.	.	.
Phase Omit	.	.	.	.	.	.	.	.	.	.	.	.
Special Function	.	.	.	.	.	.	.	.	.	.	.	.

	A	B	C	D	E	F
Alt Sequence	.	.	.	.	.	.

Step 2 Program 1 Step Begins 0900

Flash.	Dimming Enable.
Red Rest	Alt Veh Extension
Spare 5.	Det Log Enable.
Spare 3.	Spare 4
Type 0 Dly Enable. . .	Spare 2
Det Diag Plan. . . . 0	

	Phase Number											
	1	2	3	4	5	6	7	8	9	10	11	12
Max 2 Enable	.	.	.	.	.	.	.	.	.	.	.	.
Max 3 Enable	.	.	.	.	.	.	.	.	.	.	.	.
Veh Recall	.	.	.	.	.	.	.	.	.	.	.	.
Veh Max Recall	.	.	.	.	.	.	.	.	.	.	.	.
Ped Recall	.	.	.	.	.	.	.	.	.	.	.	.
Cond Service Inhibit.	.	.	.	.	.	.	.	.	.	.	.	.
Phase Omit	.	.	.	.	.	.	.	.	.	.	.	.
Special Function	.	.	.	.	.	.	.	.	.	.	.	.

	A	B	C	D	E	F
Alt Sequence	.	.	.	.	.	.

TOD Program Steps

Step 3 Program 1 Step Begins 1530

Flash.	.	Dimming Enable.	.
Red Rest	.	Alt Veh Extension	.
Spare 5.	.	Det Log Enable.	.
Spare 3.	.	Spare 4	.
Type 0 Dly Enable. . .	.	Spare 2	.
Det Diag Plan.	0		

	Phase Number											
	1	2	3	4	5	6	7	8	9	10	11	12
Max 2 Enable	.	.	.	.	.	.	.	.	.	.	.	.
Max 3 Enable	X	X	X	X	X	X	X	X	.	.	.	.
Veh Recall	.	.	.	.	.	.	.	.	.	.	.	.
Veh Max Recall	.	.	.	.	.	.	.	.	.	.	.	.
Ped Recall	.	.	.	.	.	.	.	.	.	.	.	.
Cond Service Inhibit.	.	.	.	.	.	.	.	.	.	.	.	.
Phase Omit	.	.	.	.	.	.	.	.	.	.	.	.
Special Function	.	.	.	.	.	.	.	.	.	.	.	.

	A	B	C	D	E	F
Alt Sequence	.	.	.	.	.	.

Step 4 Program 1 Step Begins 1800

Flash.	.	Dimming Enable.	.
Red Rest	.	Alt Veh Extension	.
Spare 5.	.	Det Log Enable.	.
Spare 3.	.	Spare 4	.
Type 0 Dly Enable. . .	.	Spare 2	.
Det Diag Plan.	0		

	Phase Number											
	1	2	3	4	5	6	7	8	9	10	11	12
Max 2 Enable	.	.	.	.	.	.	.	.	.	.	.	.
Max 3 Enable	.	.	.	.	.	.	.	.	.	.	.	.
Veh Recall	.	.	.	.	.	.	.	.	.	.	.	.
Veh Max Recall	.	.	.	.	.	.	.	.	.	.	.	.
Ped Recall	.	.	.	.	.	.	.	.	.	.	.	.
Cond Service Inhibit.	.	.	.	.	.	.	.	.	.	.	.	.
Phase Omit	.	.	.	.	.	.	.	.	.	.	.	.
Special Function	.	.	.	.	.	.	.	.	.	.	.	.

	A	B	C	D	E	F
Alt Sequence	.	.	.	.	.	.