


TEMPORARY 4" YELLOW LINE, PAINT
DURABLE 4" YELLOW LINE, THERMOPLASTIC
STA P 17+00 TO 19+00 DASHED
STA P 19+00 TO 27+00 DASHED LT, SOLID RT

TEMPORARY 4" WHITE LINE, PAINT
DURABLE 4" WHITE LINE, THERMOPLASTIC
STA P 17+00 TO 27+00 SOLID LT & RT

REMOVAL AND DISPOSAL OF GUARDRAIL
STA P 19+65 TO 23+77 RT
STA P 23+61 TO 27+00 LT

STEEL BEAM GUARDRAIL, GALVANIZED
STA P 20+02.5 TO 23+40.0 RT
STA P 23+71.0 TO 27+00.0 LT

MANUFACTURED TERMINAL SECTION, FLARED
STA P 19+65.0 TO 20+02.5 RT
STA P 23+33.5 TO 23+71.0 LT
STA P 23+40.0 TO 23+77.5 RT

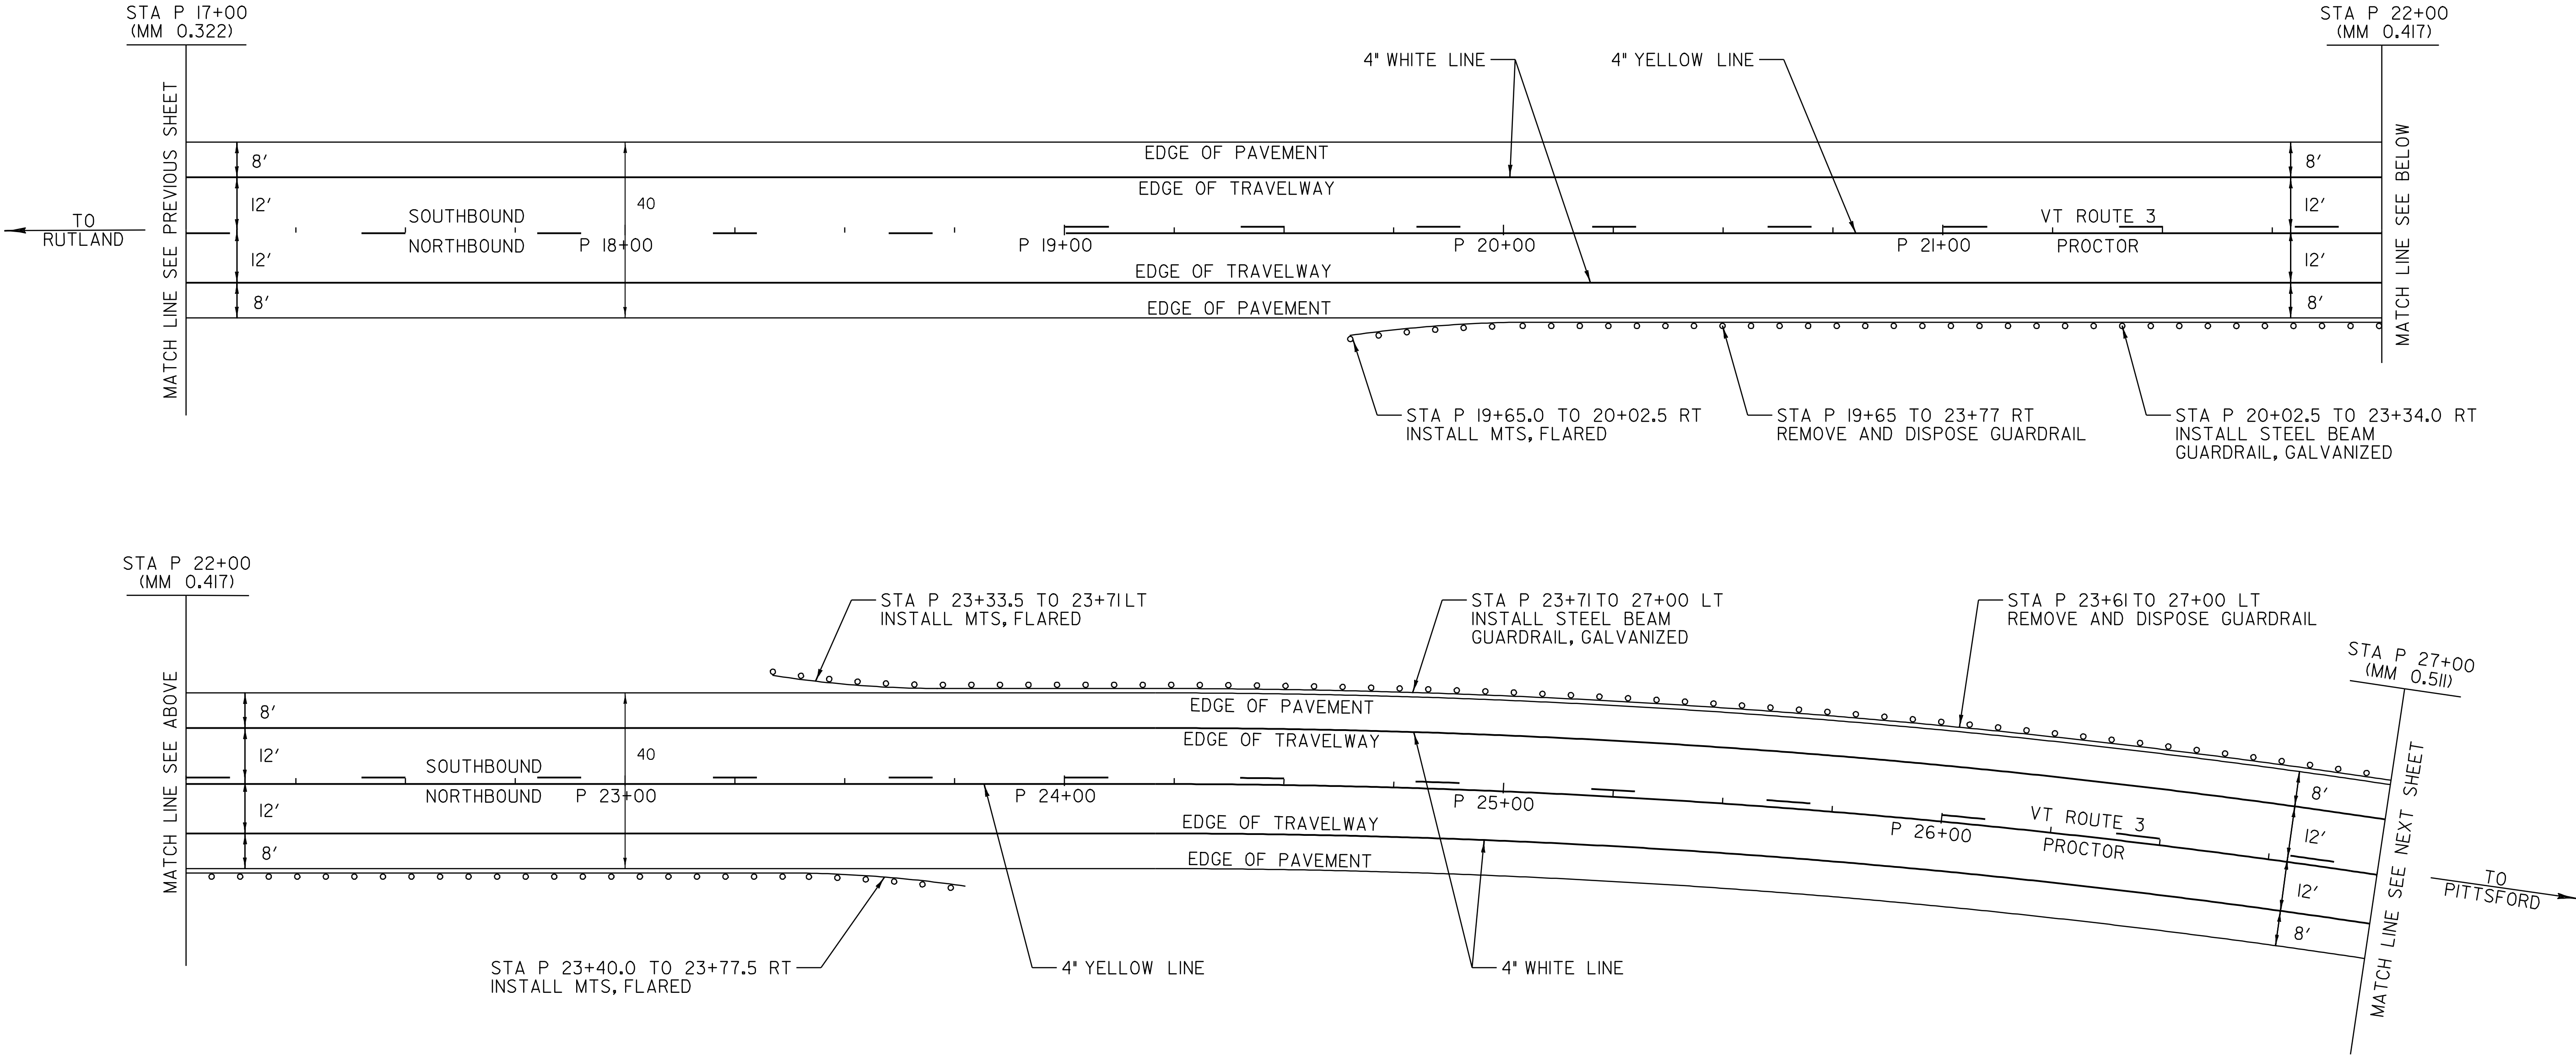

NOT TO SCALE

LEGEND

- R = REMOVE EXISTING
- S = SALVAGE
- R&S = REMOVE AND SALVAGE
- N = NEW
- RET = RETAIN
- B-B = BACK TO BACK
- = NEW GUARDRAIL
- o--o = EXISTING GUARDRAIL

SIGN INVENTORY SHEET

PAVING PROJECT LAYOUT #12	PROJECT:	PROJECT NO. :
	RUTLAND - PROCTOR	STP 2312(I)S
	DESIGN FILE NAME: /pave/01C020/pc020.dgn	PLOT DATE: 07-OCT-2008 11:
	IPARM FILE NAME: pc020ldl2.i	SURVEY DATE: 12/05
	SURVEYED BY: CLD ENGINEERS, INC	DRAWN BY: JCS
	SQUAD LEADER: PTS	SHEET: 21 OF 33
	CLD REF. NO. 05-0390	