


646.402 DURABLE 4 INCH WHITE LINE, THERMOPLASTIC
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
RADIUS FOR TOWN HIGHWAYS)
BRIGHTON:
STA 357+00.00 - STA 371+00.00 EDGE LINE LT & RT

646.412 DURABLE 4 INCH YELLOW LINE, THERMOPLASTIC
(ALL LINES WILL INCLUDE C/L BREAKS FOR
TOWN HIGHWAYS) S=SOLID, D=DASHED
BRIGHTON:
STA 357+00.00 - STA 371+00.00 LT C RT
S - S

646.602 TEMPORARY 4 INCH WHITE LINE, PAINT
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
RADIUS FOR TOWN HIGHWAYS)
BRIGHTON:
STA 357+00.00 - STA 371+00.00 EDGE LINE LT & RT

646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT
(ALL LINES WILL INCLUDE C/L BREAKS FOR
TOWN HIGHWAYS) S=SOLID, D=DASHED
BRIGHTON:
STA 357+00.00 - STA 371+00.00 LT C RT
S - S

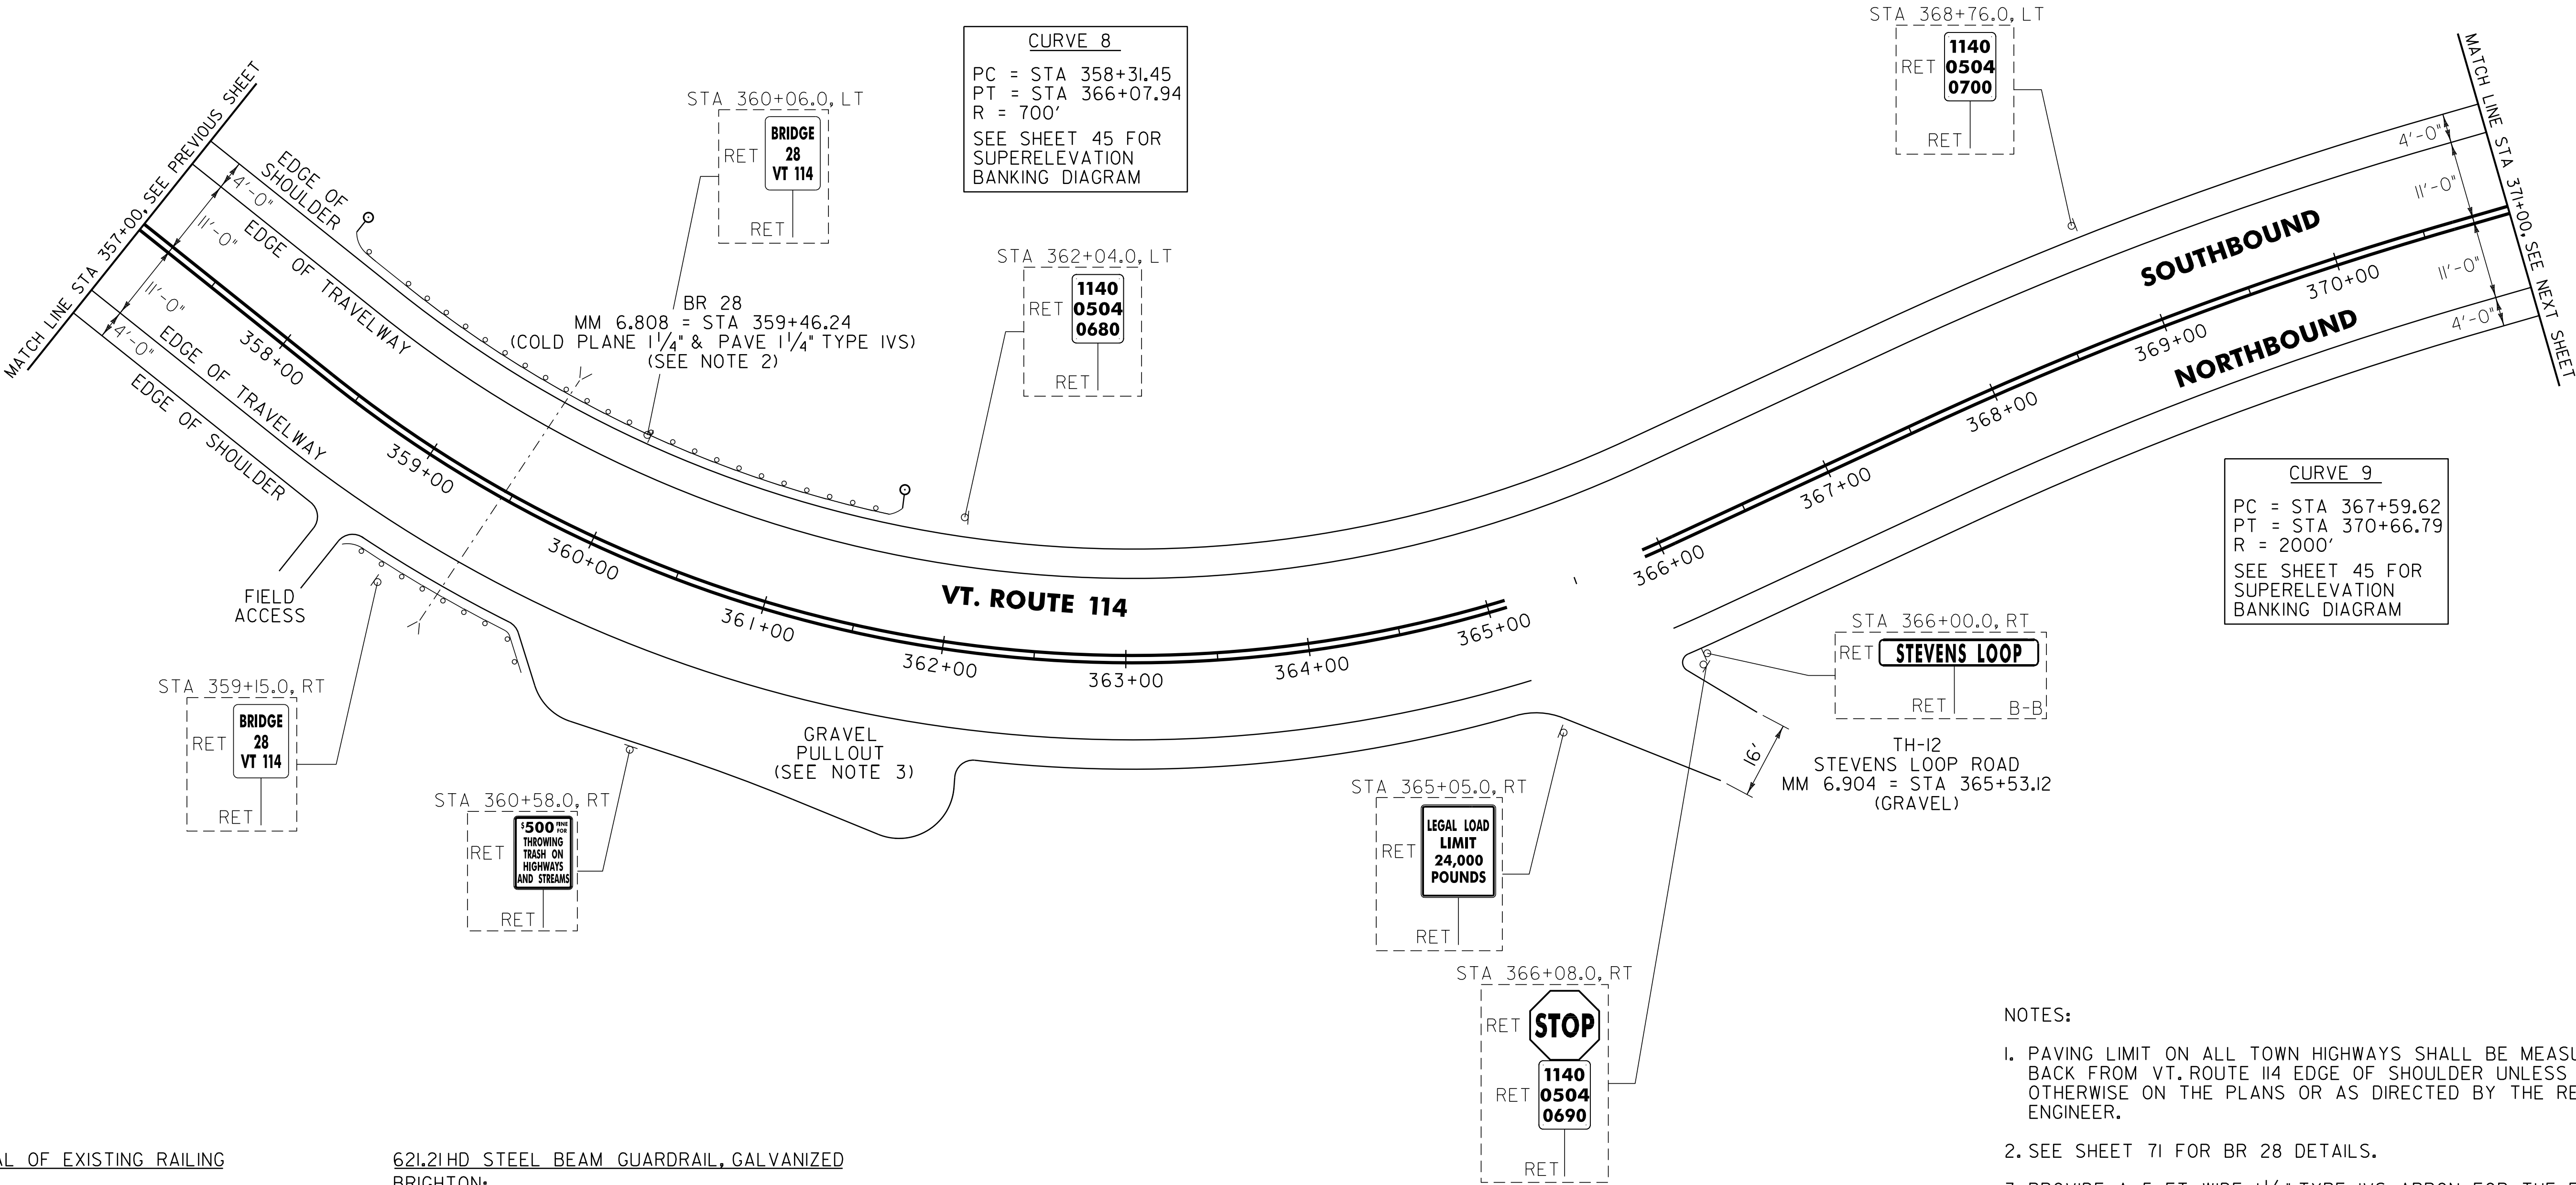

525.10 REMOVAL OF EXISTING RAILING
BRIGHTON:
STA 359+23.5 - STA 359+61.0 RT (37.5 LF)
STA 359+32.0 - STA 359+69.5 LT (37.5 LF)

525.60 BRIDGE RAILING REPAIR, TYPE III
BRIGHTON:
STA 359+23.5 - STA 359+61.0 RT (37.5 LF)
STA 359+32.0 - STA 359+69.5 LT (37.5 LF)

621.20 STEEL BEAM GUARDRAIL, GALVANIZED
BRIGHTON:
STA 358+57.0 - STA 359+07.0 LT (50.0 LF)
STA 358+84.0 - STA 358+98.5 RT (14.5 LF)
STA 359+86.0 - STA 359+87.0 RT (14.5 LF)
STA 359+94.5 - STA 361+32.0 LT (137.5 LF)

621.21HD STEEL BEAM GUARDRAIL, GALVANIZED
BRIGHTON:
STA 358+98.5 - STA 359+23.5 RT (32.5 LF)
STA 359+07.0 - STA 359+32.0 LT (32.5 LF)
STA 359+61.0 - STA 359+86.0 RT (32.5 LF)
STA 359+69.5 - STA 359+94.5 LT (32.5 LF)

621.50 MANUFACTURED TERMINAL SECTION, FLARED
BRIGHTON:
STA 358+19.5 - STA 358+57.0 LT
STA 361+32.0 - STA 361+69.5 LT

621.60 ANCHOR FOR STEEL BEAM RAIL
BRIGHTON:
STA 358+90.5 RT
STA 359+86.5 RT

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL
BRIGHTON:
STA 358+80.0 - STA 359+32.0 LT (52.0 LF)
STA 359+00.0 - STA 359+23.5 RT (23.5 LF)
STA 359+61.0 - STA 359+87.0 RT (26.0 LF)
STA 359+69.5 - STA 360+81.0 LT (111.5 LF)

676.10 DELINEATOR WITH STEEL POST
BRIGHTON:
STA 358+19.5 LT
STA 361+69.5 LT

SIGN LEGEND
R = REMOVE
S = SALVAGE
N = NEW
RET = RETAIN
B-B = BACK TO BACK
EXISTING = -----
NEW = _____

- NOTES:
- PAVING LIMIT ON ALL TOWN HIGHWAYS SHALL BE MEASURED 25 FT BACK FROM VT. ROUTE 114 EDGE OF SHOULDER UNLESS DENOTED OTHERWISE ON THE PLANS OR AS DIRECTED BY THE RESIDENT ENGINEER.
 - SEE SHEET 71 FOR BR 28 DETAILS.
 - PROVIDE A 5 FT WIDE, 1 1/2" TYPE IVS APRON FOR THE EXISTING GRAVEL PULLOUT. ANY REQUIRED EXCAVATION SHALL BE PERFORMED AS DIRECTED BY THE RESIDENT ENGINEER AND PAID FOR UNDER ITEM 608.25 ALL PURPOSE EXCAVATOR RENTAL, TYPE I.

NOT TO SCALE		
PROJECT LAYOUT SHEET #7	PROJECT NAME:	BRIGHTON - WARREN GORE
	PROJECT NUMBER:	STP 272400S
	FILE NAME:	p07c216.dgn
	PROJECT LEADER:	D.E.G.
	DESIGNED BY:	M.J.L.
	IPARM FILE:	p07c216107.1
	PLOT DATE:	31-OCT-2011 11:50
	DRAWN BY:	C.A.K.
	CHECKED BY:	D.W.E.
		SHEET 27 OF 107