

646.402 DURABLE 4 INCH WHITE LINE, THERMOPLASTIC
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
RADIUS FOR TOWN HIGHWAYS)
WARREN GORE:
STA 1+00.00 - STA 29+00.00 EDGE LINE LT & RT

646.412 DURABLE 4 INCH YELLOW LINE, THERMOPLASTIC
(ALL LINES WILL INCLUDE C/L BREAKS FOR
TOWN HIGHWAYS) S=SOLID, D=DASHED
WARREN GORE:
STA 1+00.00 - STA 29+00.00


LT C RT
S - S

646.602 TEMPORARY 4 INCH WHITE LINE, PAINT
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
RADIUS FOR TOWN HIGHWAYS)
WARREN GORE:
STA 1+00.00 - STA 29+00.00 EDGE LINE LT & RT

646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT
(ALL LINES WILL INCLUDE C/L BREAKS FOR
TOWN HIGHWAYS) S=SOLID, D=DASHED
WARREN GORE:
STA 1+00.00 - STA 29+00.00

LT C RT
S - S

675.50 REMOVING SIGNS
AS SHOWN - 3

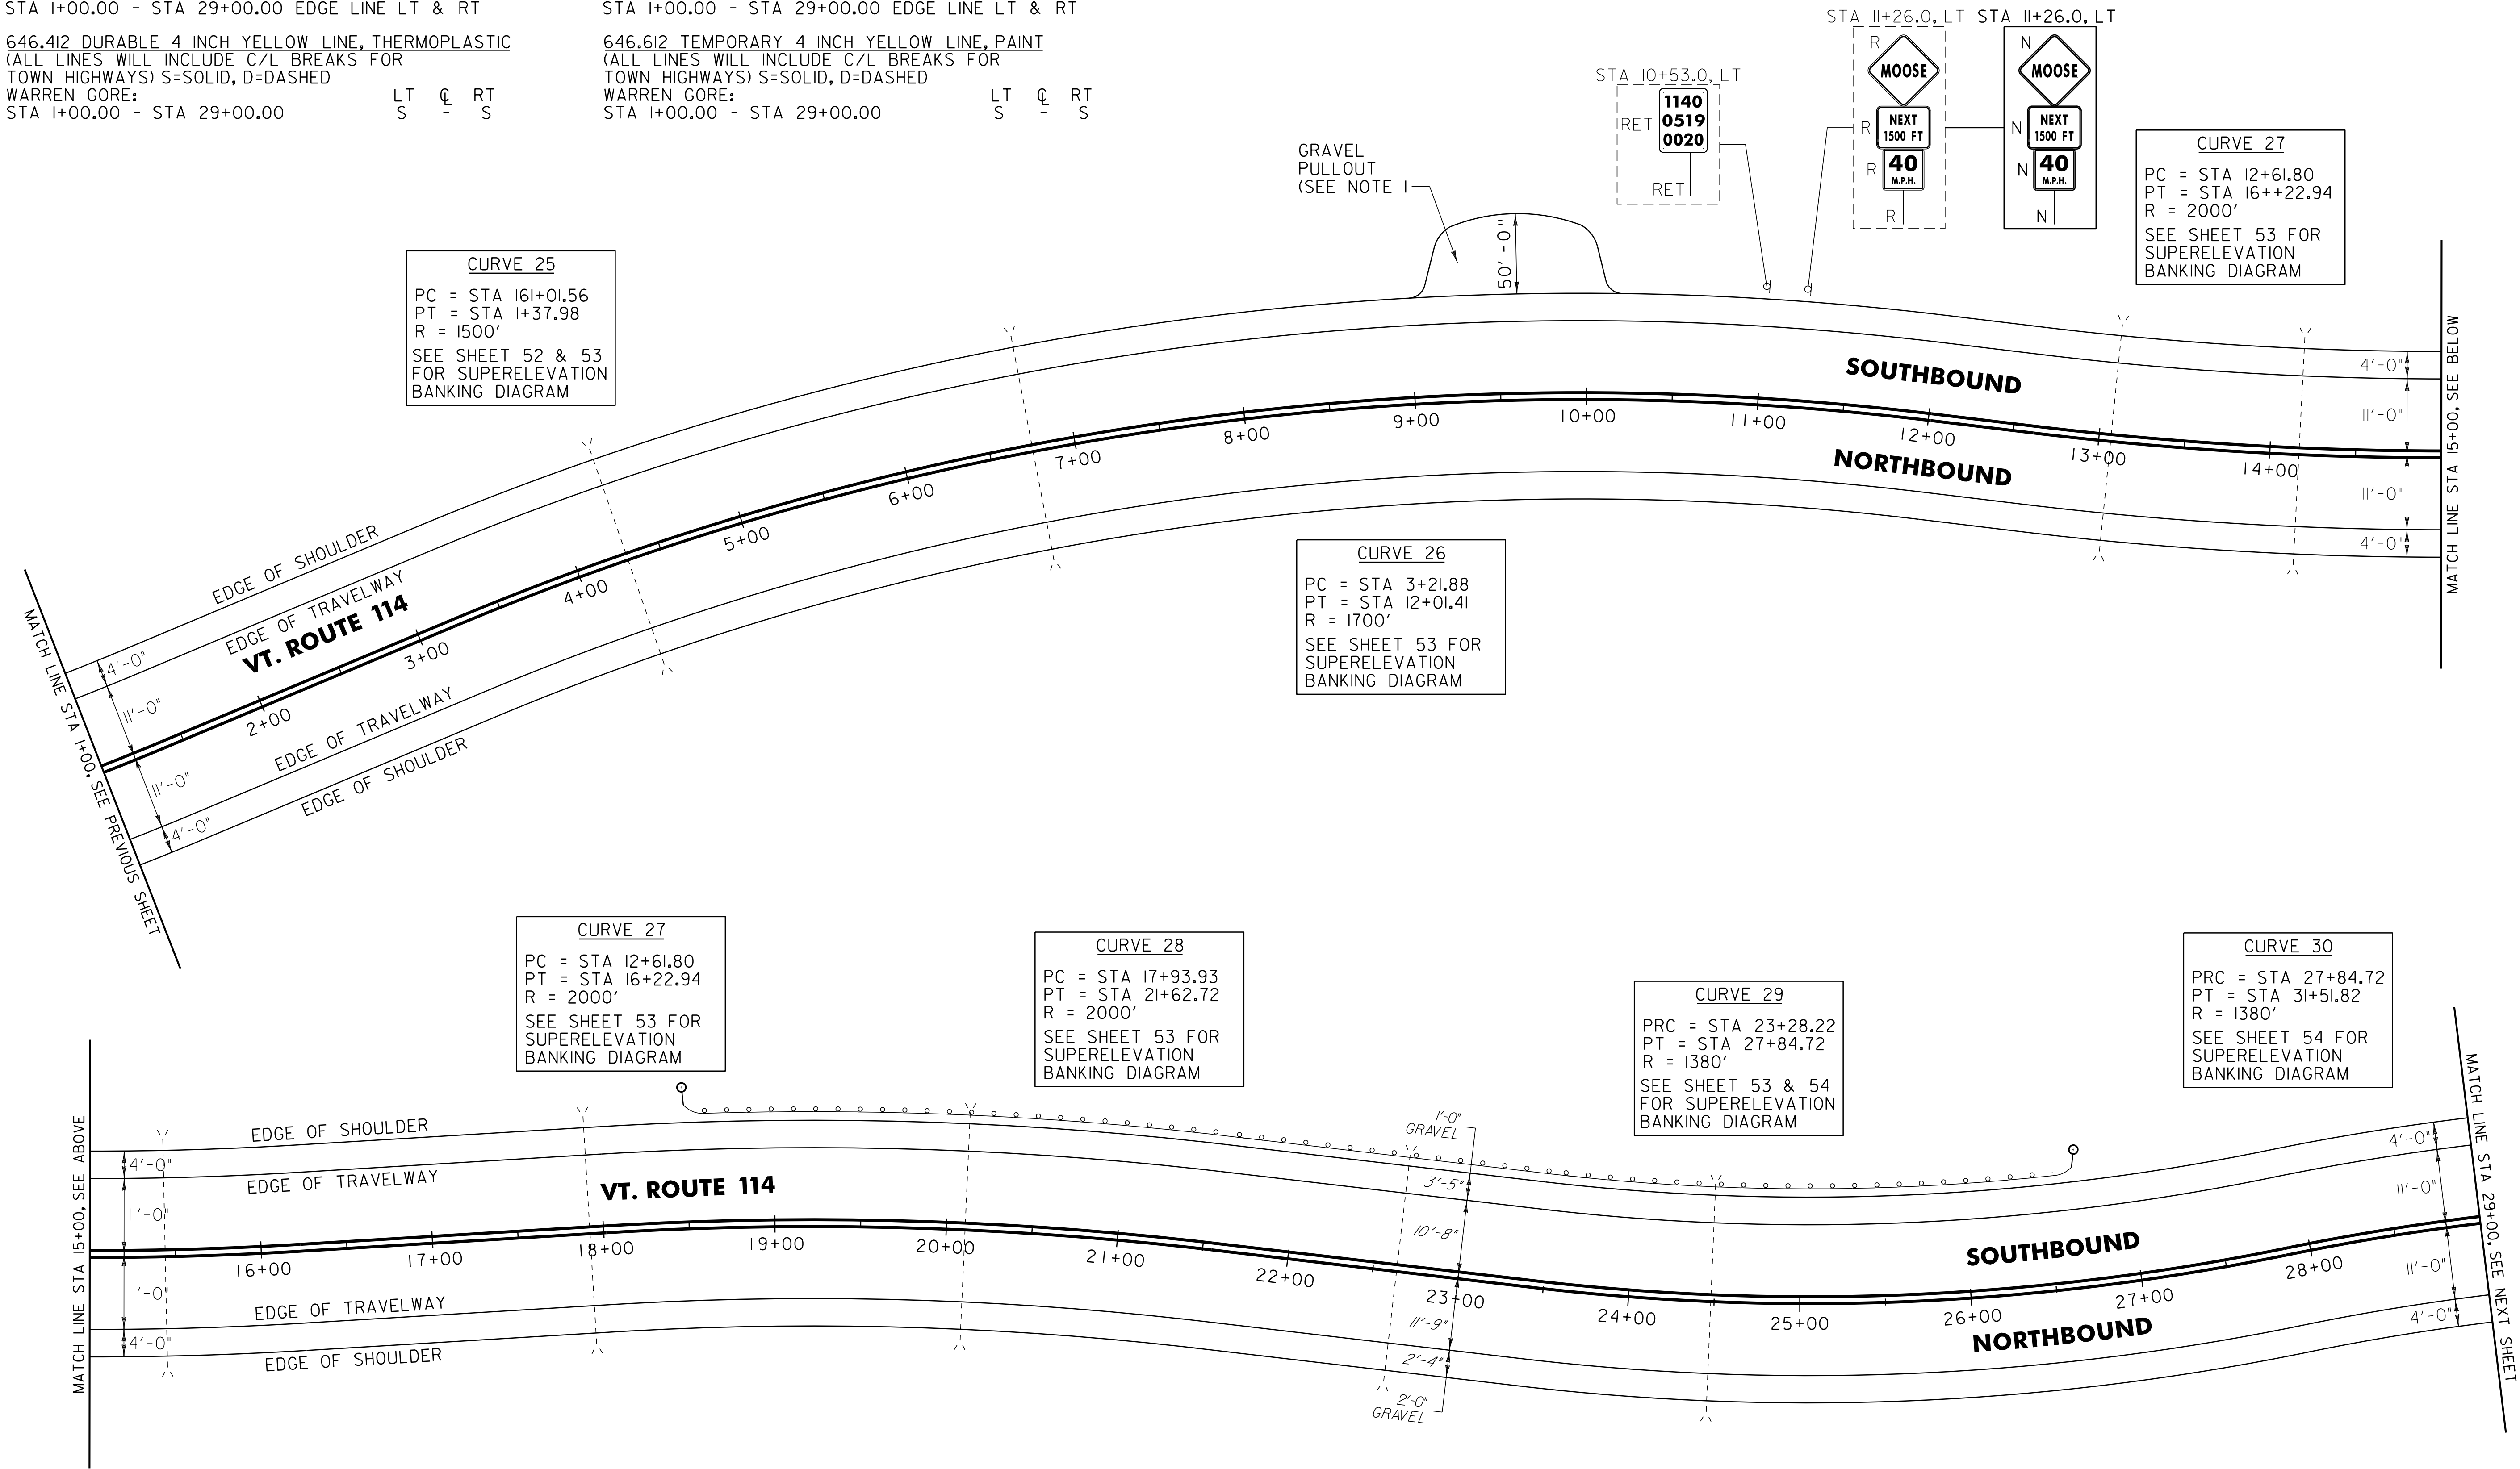

621.20 STEEL BEAM GUARDRAIL, GALVANIZED
WARREN GORE:
STA 18+82.5 - STA 26+20.0 LT (737.5 LF)

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL
WARREN GORE:
STA 18+50.0 - STA 25+27.0 LT (677.0 LF)

621.50 MANUFACTURED TERMINAL SECTION, FLARED
WARREN GORE:
STA 18+45.0 - STA 18+82.5 LT
STA 26+20.0 - STA 26+57.5 LT

676.10 DELINEATOR WITH STEEL POST
WARREN GORE:
STA 18+45.0 LT
STA 26+57.5 LT

NOTE:

1. PROVIDE A 5 FT WIDE, 1 1/2" TYPE IVS APRON FOR THE EXISTING GRAVEL PULLOUT. ANY REQUIRED EXCAVATION SHALL BE PERFORMED AS DIRECTED BY THE RESIDENT ENGINEER AND PAID FOR UNDER ITEM 608.25 ALL PURPOSE EXCAVATOR RENTAL, TYPE I.

SIGN LEGEND
R = REMOVE
S = SALVAGE
N = NEW
RET = RETAIN
B-B = BACK TO BACK
EXISTING = - - - - -
NEW = - - - - -

NOT TO SCALE

PROJECT
LAYOUT
SHEET #17

PROJECT NAME: BRIGHTON - WARREN GORE
PROJECT NUMBER: STP 272400S

FILE NAME: p07c216.dgn
PROJECT LEADER: D.E.G.
DESIGNED BY: M.J.L.
IPARM FILE: p07c216117.i

PLOT DATE: 31-OCT-2011 11:51
DRAWN BY: C.A.K.
CHECKED BY: D.W.E.
SHEET 37 OF 107