LOCATION				FEET OF DITCHING				MISC. ITEMS		REMARKS
								653.20	651.15	
SITE	STATION	STATION	POS.	PERCENT GRADE				TEMP. EROS. MATT.	SEED	
				0-1	1-2.5	2.5-10	>10	SY	LB	
VT. ROUTE 114										
WARREN GORE:										
1	212+00	213+85	RT		185			82	1	
2	240+25	247+90	RT		765			340	4	
NORTON:										
3	1+85	8+70	RT		685			304	4	
4	132+30	139+65	RT		713			317	4	
ROUNDINGS					27			57	2	
TOTALS					2375			1100	15	

LOCATION				FEET OF DITCHING				MISC. ITEMS		REMARKS
								653.20	651.15	
SITE	STATION	STATION	POS.	PERCENT GRADE				TEMP. EROS. MATT.	SEED	
				0-1	1-2.5	2.5-10	>10	SY	LB	

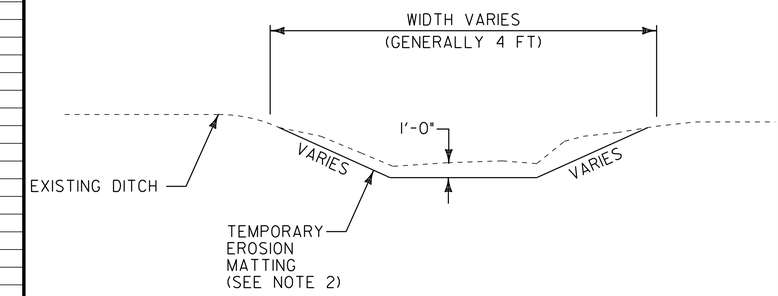

DITCH DETAIL

NOTES:

1. PIPE INLET AND OUTLET AREAS AND DITCH CLEANING THROUGHOUT THE PROJECT SHALL BE PERFORMED AT LOCATIONS IDENTIFIED ON THIS SHEET AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).
2. ESTIMATED QUANTITIES OF TEMPORARY EROSION MATTING AND SEED HAVE BEEN INCLUDED AS NEEDED OR AS DIRECTED BY THE RESIDENT ENGINEER.

DITCH CLEANING DETAIL SHEET

PROJECT NAME: WARREN GORE - NORTON

PROJECT NUMBER: STP 2725(1)S

FILE NAME: p07c218.dgn
PROJECT LEADER: D.E.G.
DESIGNED BY: M.J.L.
IPARM FILE: p07c218dcd.i

PLOT DATE: 31-OCT-2011 11:53
DRAWN BY: C.A.K.
CHECKED BY: D.W.E.
SHEET 81 OF 107