

TEMPORARY 4 INCH WHITE LINE, PAINT
DURABLE 4 INCH WHITE LINE (OPTION BID ITEM)

446+25 TO 446+84 SOLID LT
446+25 TO 452+25 DASHED LT (LANE LINE)
446+25 TO 452+25 SOLID RT
446+25 TO 452+25 DASHED RT (LANE LINE)
446+84 TO 447+22 SOLID LT (TH 74)
447+44 TO 447+93 SOLID LT (TH 74)
447+93 TO 452+25 SOLID LT
450+31 TO 451+70 DOTTED RT (LANE LINE)
451+70 TO 452+25 SOLID RT (LANE LINE)

TEMPORARY 4 INCH YELLOW LINE, PAINT
DURABLE 4 INCH YELLOW LINE (OPTION BID ITEM)

446+25 TO 447+15 SOLID LT & RT
447+33 TO 447+37 DOUBLE SOLID LT (TH 74)
447+64 TO 452+25 SOLID LT
447+64 TO 452+25 SOLID RT

TEMPORARY 24 INCH STOP BAR, PAINT
DURABLE 24 INCH STOP BAR (OPTION BID ITEM)

447+13 TO 447+36 SOLID LT (TH 74)

DURABLE LETTER OR SYMBOL (OPTION BID ITEM)

447+27 LT - "STOP" (TH 74)
451+74 RT - LEFT TURN ARROW
451+74 RT - THRU ARROW
451+74 RT - RIGHT TURN/THRU ARROW
452+12 RT - "ONLY"

TEMPORARY LETTER OR SYMBOL, PAINT

447+27 LT - "STOP" (TH 74)
451+74 RT - LEFT TURN ARROW
451+74 RT - THRU ARROW
451+74 RT - RIGHT TURN/THRU ARROW

PAINTED CURB

447+65 TO 447+95 LT & RT (ISLAND)
450+00 TO 450+60 RT (ISLAND)
451+00 TO 451+60 LT (ISLAND)

PAINTED ISLAND

451+75 TO 452+25 LT

REHAB. DROP INLETS, CATCH BASINS,
OR MANHOLES, CLASS I, CLASS II
452+19 LT (DI)

STEEL BEAM GUARDRAIL, GALVANIZED

449+27.5 TO 452+25 LT
451+85 TO 452+25 RT

ANCHOR FOR STEEL BEAM RAIL


449+27.5 LT
451+85 RT

REMOVAL AND DISPOSAL OF GUARDRAIL

449+29 TO 452+25 LT
451+87 TO 452+25 RT

DELINEATOR WITH STEEL POST

449+27.5 LT
451+85 RT

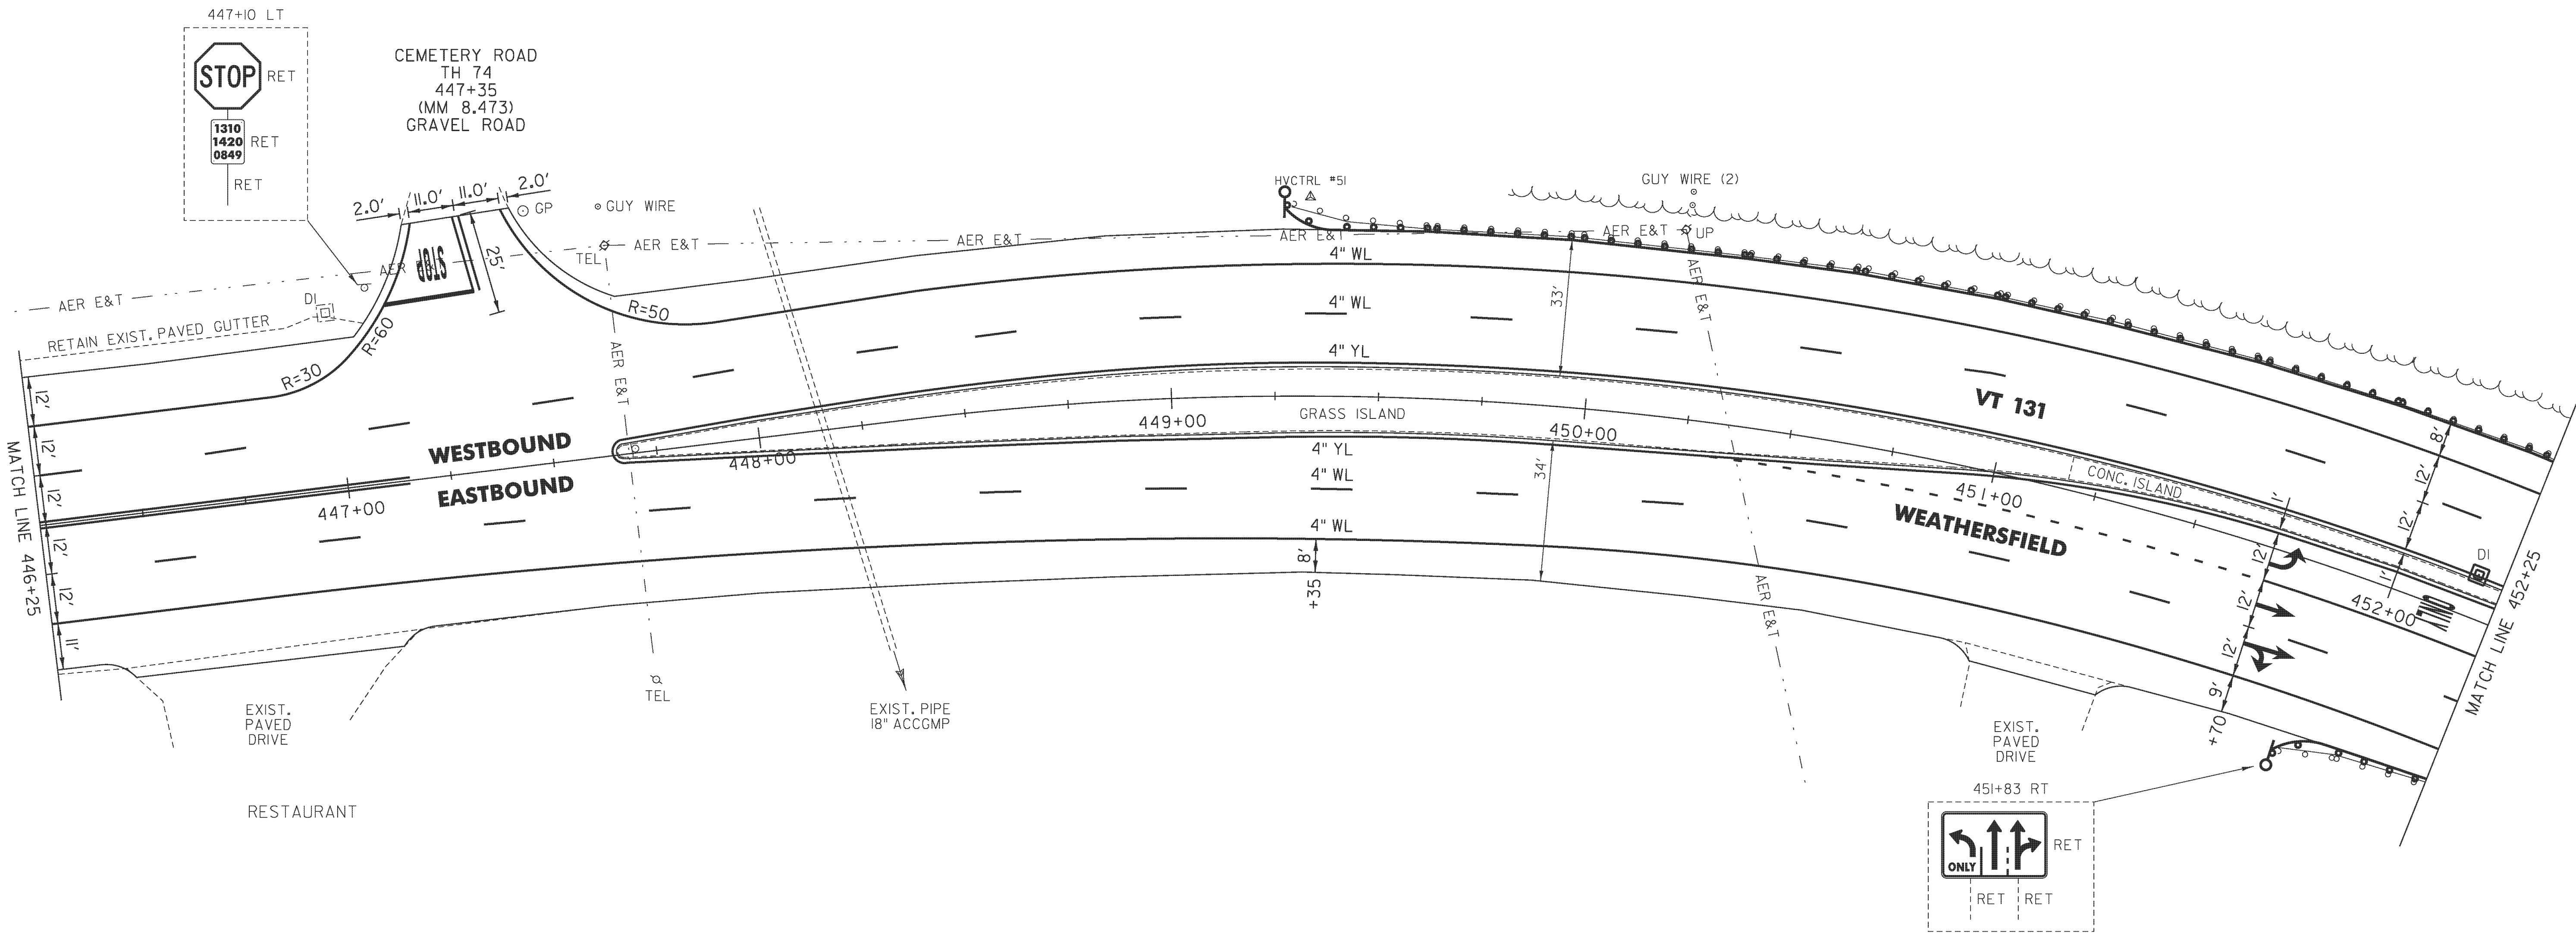

LEGEND

- R = REMOVE EXISTING
- S = SALVAGE
- R&S = REMOVE AND SALVAGE
- N = NEW
- RET = RETAIN
- B-B = BACK TO BACK
- = EXISTING GUARDRAIL
- = PROPOSED GUARDRAIL
- YL = YELLOW LINE
- WL = WHITE LINE
- = DELINEATOR

ROADWAY LAYOUT SHEET 4

PROJECT NAME: WEATHERSFIELD

PROJECT NUMBER: NH 2948(I)

FILE NAME: pl2bi26.dgn

PROJECT LEADER: PTS

DESIGNED BY: NLL

IPARM FILE NAME: pl2bi26_220

PLOT DATE: 2/7/2013

DRAWN BY: SNG

CHECKED BY: PTS

SHEET 220 OF 234