

TEMPORARY 4 INCH WHITE LINE, PAINT
DURABLE 4 INCH WHITE LINE (OPTION ITEM)
N 401+50 TO N 407+50 SOLID LT
N 401+50 TO N 402+56 SOLID RT
N 402+56 TO N 402+87 SOLID RT (TH 30)
N 403+11 TO N 403+30 SOLID RT (TH 30)
N 403+30 TO N 407+50 SOLID RT

TEMPORARY 4 INCH YELLOW LINE, PAINT
N 401+50 TO N 402+75 DASHED LT, SOLID RT
N 402+95 TO N 402+99 DOUBLE SOLID RT (TH 30)
N 403+15 TO N 404+45 SOLID LT & RT
N 404+45 TO N 407+50 SOLID LT, DASHED RT

DURABLE 4 INCH YELLOW LINE (OPTION ITEM)
N 402+95 TO N 402+99 DOUBLE SOLID RT (TH 30)

DURABLE 4 INCH YELLOW LINE, EPOXY PAINT OR
DURABLE 4 INCH YELLOW LINE, POLYUREA (OPTION ITEM)
N 401+50 TO N 402+75 DASHED LT, SOLID RT
N 403+15 TO N 404+45 SOLID LT & RT
N 404+45 TO N 407+50 SOLID LT, DASHED RT

TEMPORARY 24 INCH STOP BAR, PAINT
DURABLE 24 INCH STOP BAR (OPTION ITEM)
N 402+96 TO N 403+14 RT

TEMPORARY LETTER OR SYMBOL, PAINT
DURABLE LETTER OR SYMBOL (OPTION ITEM)
N 403+04 RT "STOP"

STEEL BEAM GUARDRAIL, GALVANIZED
N 402+54.5 LT (12.5')
N 402+61.5 TO N 402+73 RT
N 403+17 TO N 403+18 RT

ANCHOR FOR STEEL BEAM RAIL
1' (SEE STANDARD G-1d)

REMOVE AND RESET GUARDRAIL
N 401+50 TO N 402+46.5 LT
N 401+50 TO N 402+61.5 RT
N 403+17 TO N 407+50 RT

REMOVAL AND DISPOSAL OF GUARDRAIL
N 402+46.5 TO N 402+55 LT
N 402+61.5 TO N 402+79 RT
N 403+17 TO N 403+33 RT


SPECIAL PROVISION (STEEL BEAM
GUARDRAIL GALVANIZED) (8 FEET RADIUS)
N 402+46.5 LT

SPECIAL PROVISION (STEEL BEAM
GUARDRAIL GALVANIZED) (16 FEET RADIUS)
N 403+33 RT

DELINEATOR WITH STEEL POST
N 402+46.5 LT
N 402+73 RT
N 403+18 RT

MILLED RUMBLE STRIPS
N 401+50 TO N 402+75 CL
N 403+15 TO N 407+50 CL

REMOVING SIGNS
AS SHOWN - 10

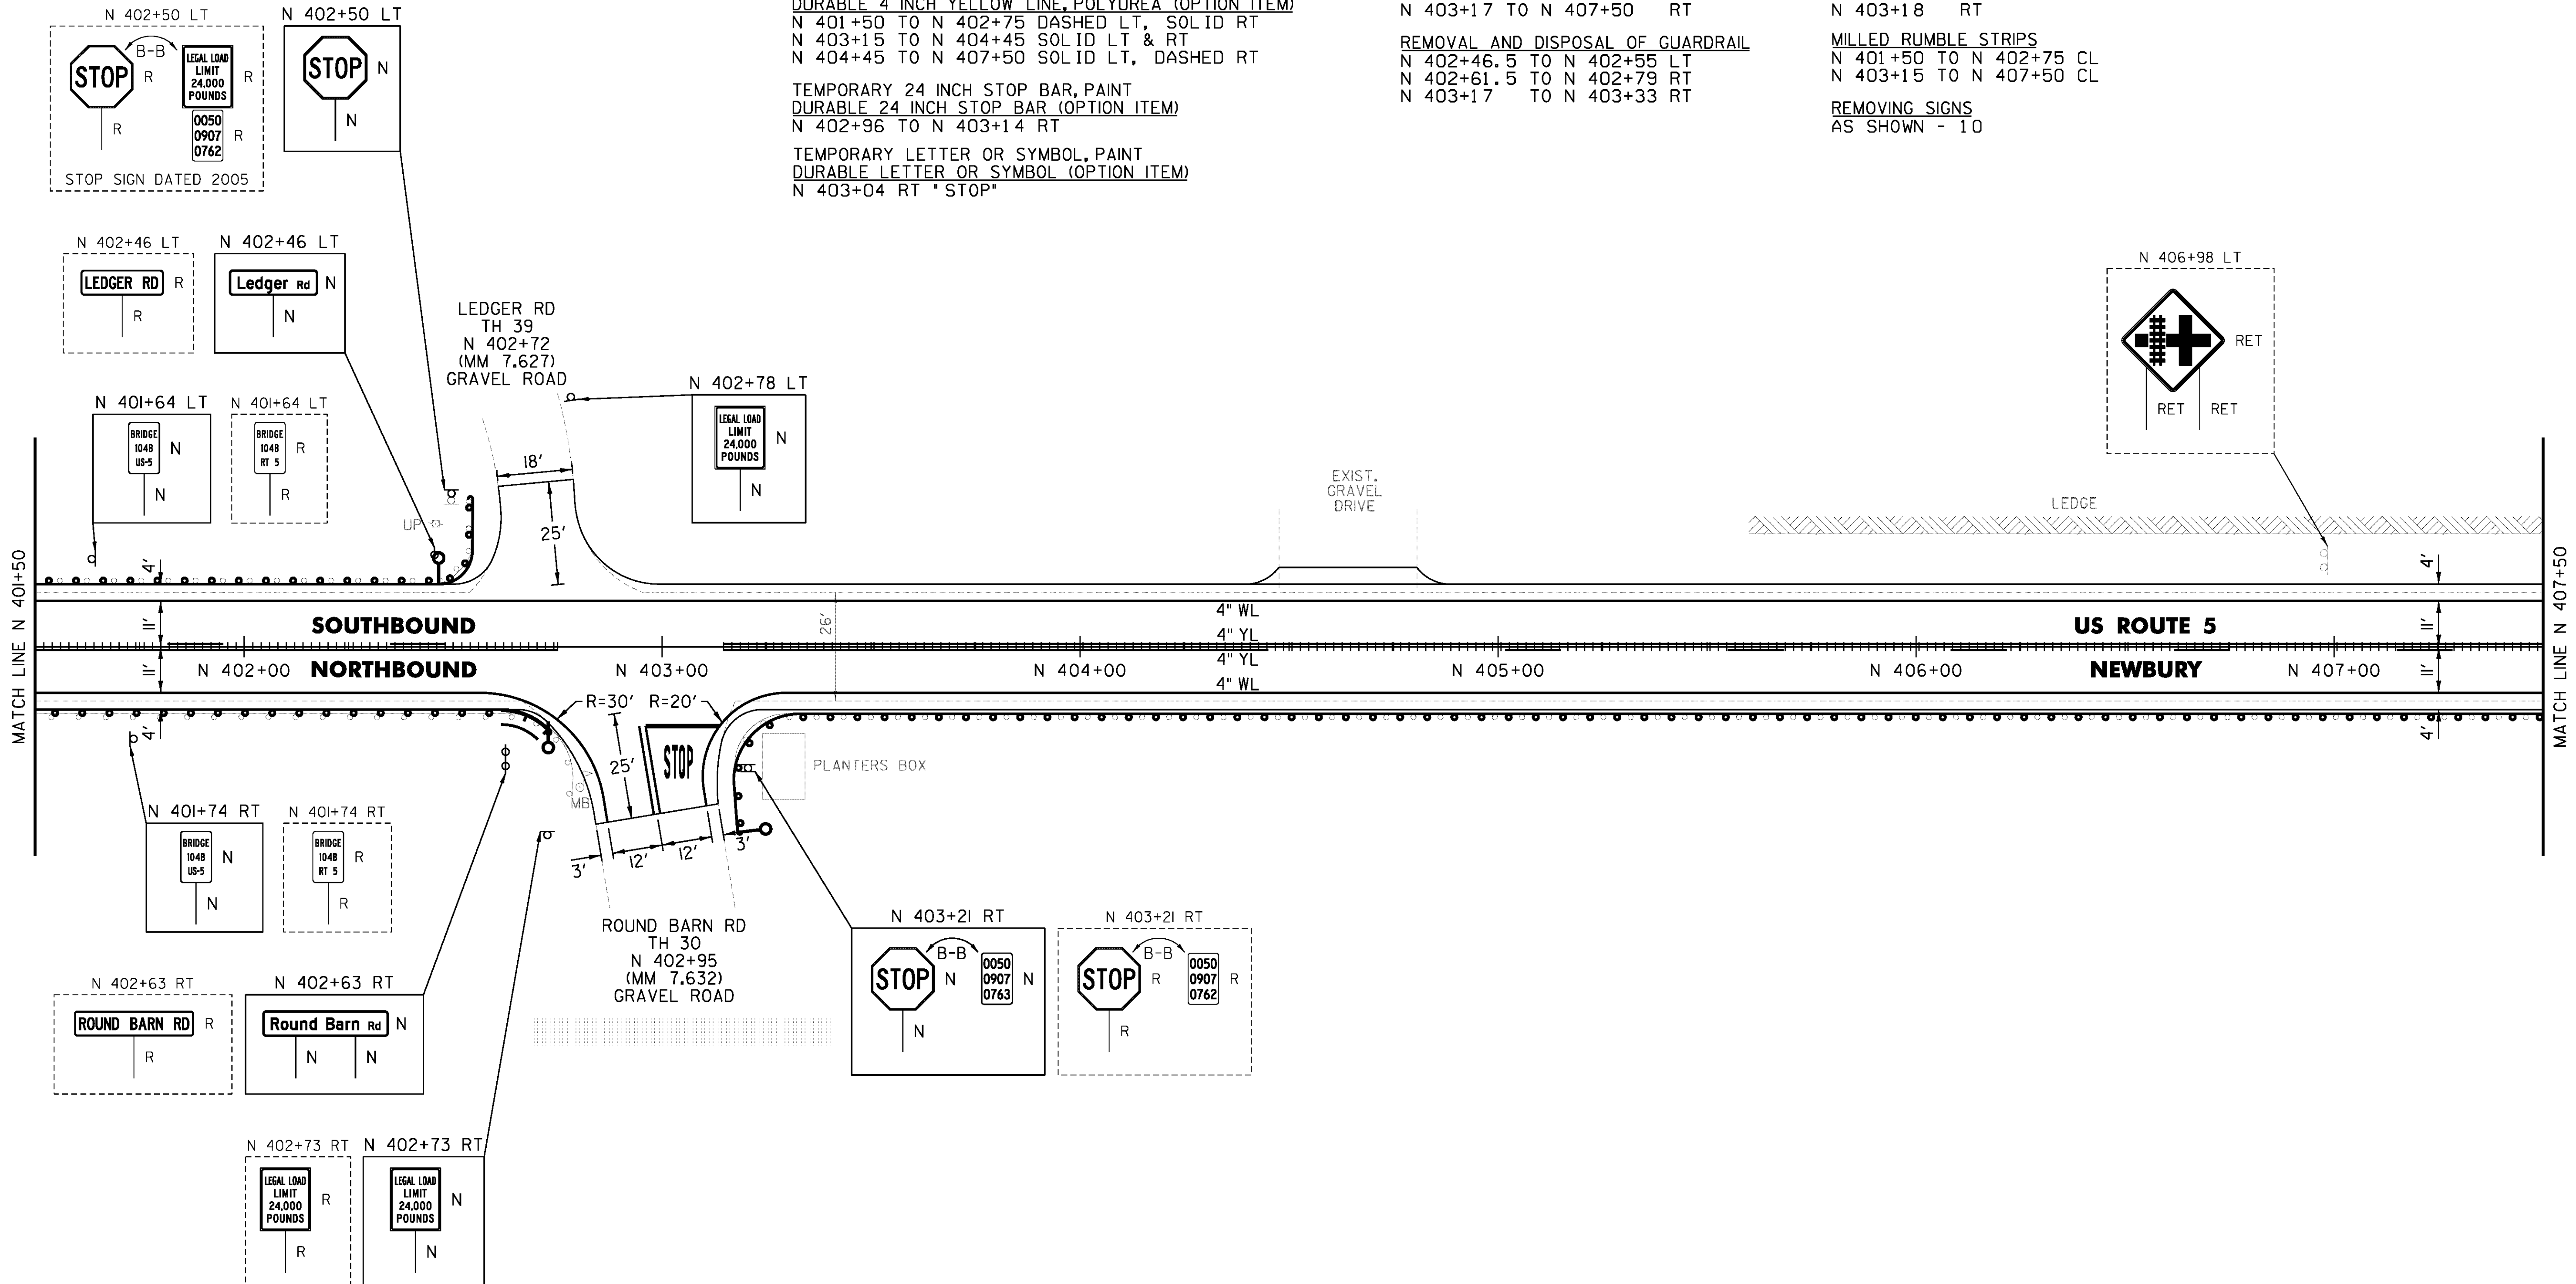

NOT TO SCALE

PROJECT NAME: BRADFORD-RYEGATE
PROJECT NUMBER: STP 2929(I)

FILE NAME: z10c264bdr.dgn
PROJECT LEADER: P. SHEDD
DESIGNED BY: N. LEMAY
US 5 PLAN SHEET 108

PLOT DATE: 2/4/2016
DRAWN BY: W. GORDON
CHECKED BY: P. SHEDD
SHEET 166 OF 239