

WOOD GUARD RAIL REQUIRED

LEFT

Sta. 910+60 to 910+84 Length 24 ft.

RIGHT

Sta. 910+60 to 910+84 Length 24 ft.

NEW CULVERTS REQUIRED

Sta. 910+72 24" Rein. Concrete Pipe Culvert 32 ft.
Concrete Class B (1-2-4)
26 Cu. Yds.
Reinforcing Steel 60 Pounds.



DEFERRED CULVERTS REQUIRED

Sta. 902+90 Right 12" Cor. Galv. Metal Pipe 20 ft.
Concrete Class B (1-2-4)
1.1 Cu. Yds.

Sta. 905+20 Right 12" Cor. Galv. Metal Pipe 30 ft.
Concrete Class B (1-2-4)
1.1 Cu. Yds.

Sta. 908+95 Right 12" Tile To be retained
Build New Headwalls
Concrete Class B (1-2-4)
1.1 Cu. Yds.

FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
9	VT.	72.6	1928	32	104

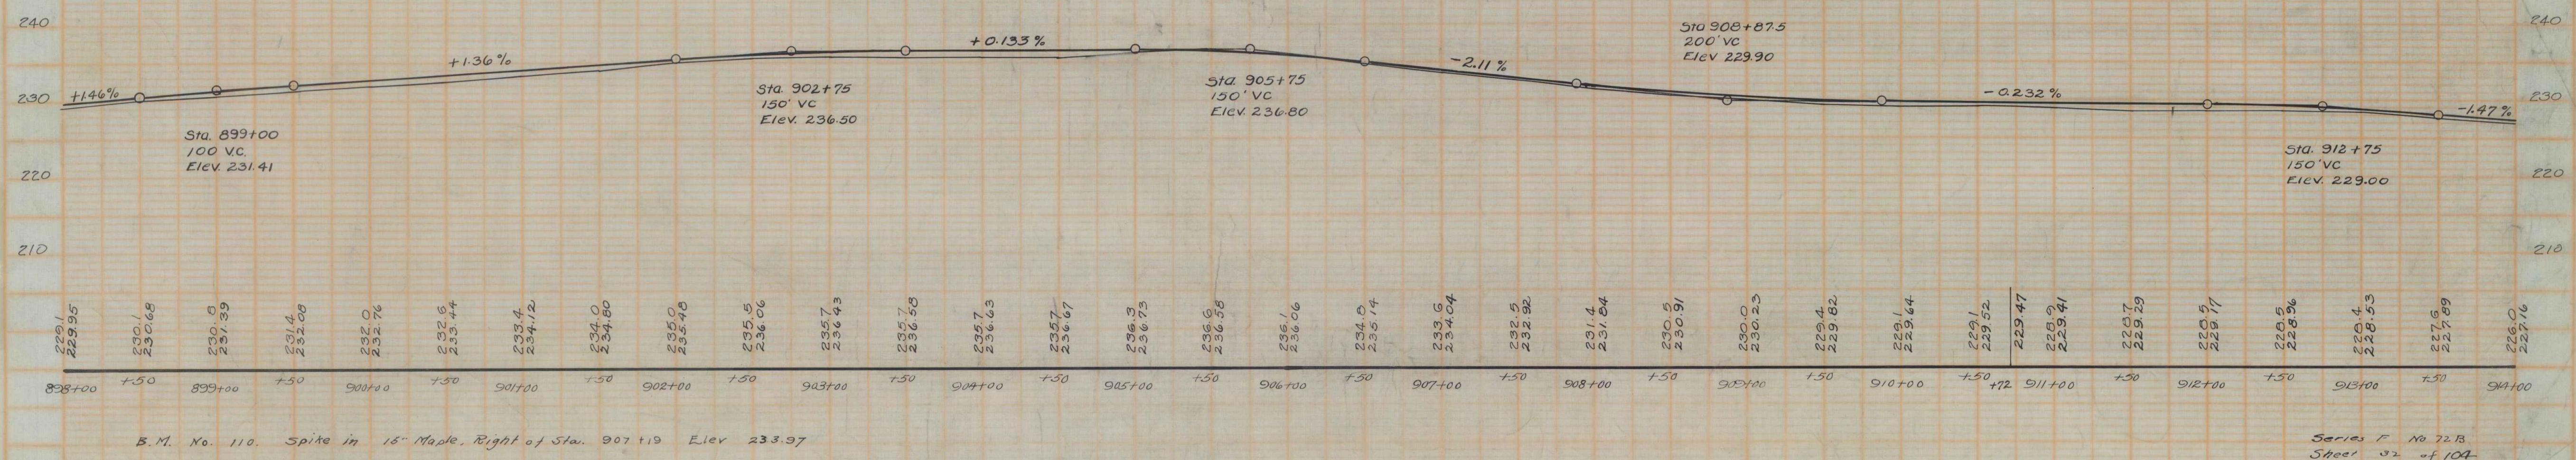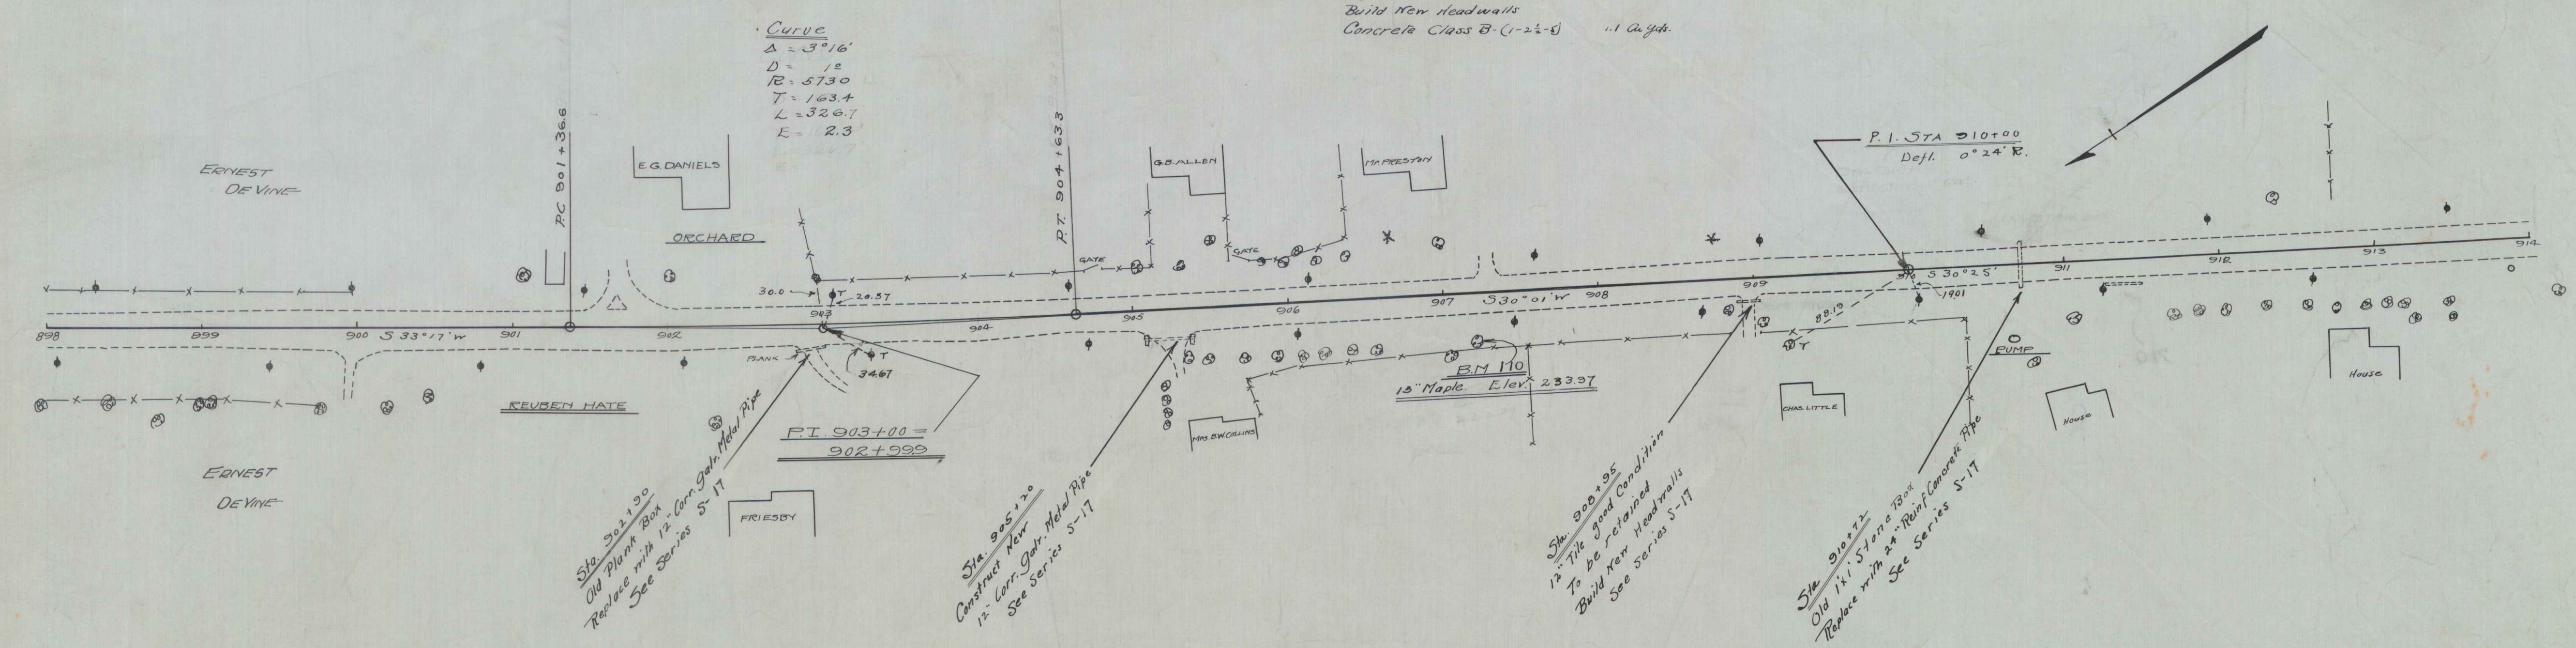

Series F. No. 72.13
Sheet 32 of 104