

CONSTRUCT GRAVEL DRIVES		
LOCATION/TYPE	RADII STA/OFFSET	APPROX. WIDTH
STA 49+17 RT/(R)	STA 48+99.00/32.00 FT	13 FT
	STA 49+36.00/32.00 FT	
STA 49+66 LT/(R)	STA 49+38.35/32.00 FT	32 FT
	STA 49+94.70/32.00 FT	
STA 55+06 RT/(R)	STA 54+84.93/32.00 FT	16 FT
	STA 55+25.02/32.00 FT	

RELOCATE MAILBOX, SINGLE SUPPORT

STA 49+33 RT
STA 55+25 RT

RELOCATE MAILBOX, MULTIPLE SUPPORT

STA 55+98 LT (8)

REMOVAL OF EXISTING FENCE

STA 48+00 - 48+90 RT (ABANDONED BARBED WIRE)
STA 53+26 - 55+02 LT (WOOD STOCKADE FENCE)

SPECIAL PROVISION (REMOVE AND STOCKPILE STONE WALL)

STA 55+16 - 55+95 LT

SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES)



STA 49+17 RT
STA 49+66 LT
STA 55+06 RT

SPECIAL PROVISION (PRESSURE TREATED BOARD FENCE)

STA 53+26 - 55+02 LT

SPECIAL PROVISION (REMOVE COMMERCIAL SIGN)

STA 55+91 LT

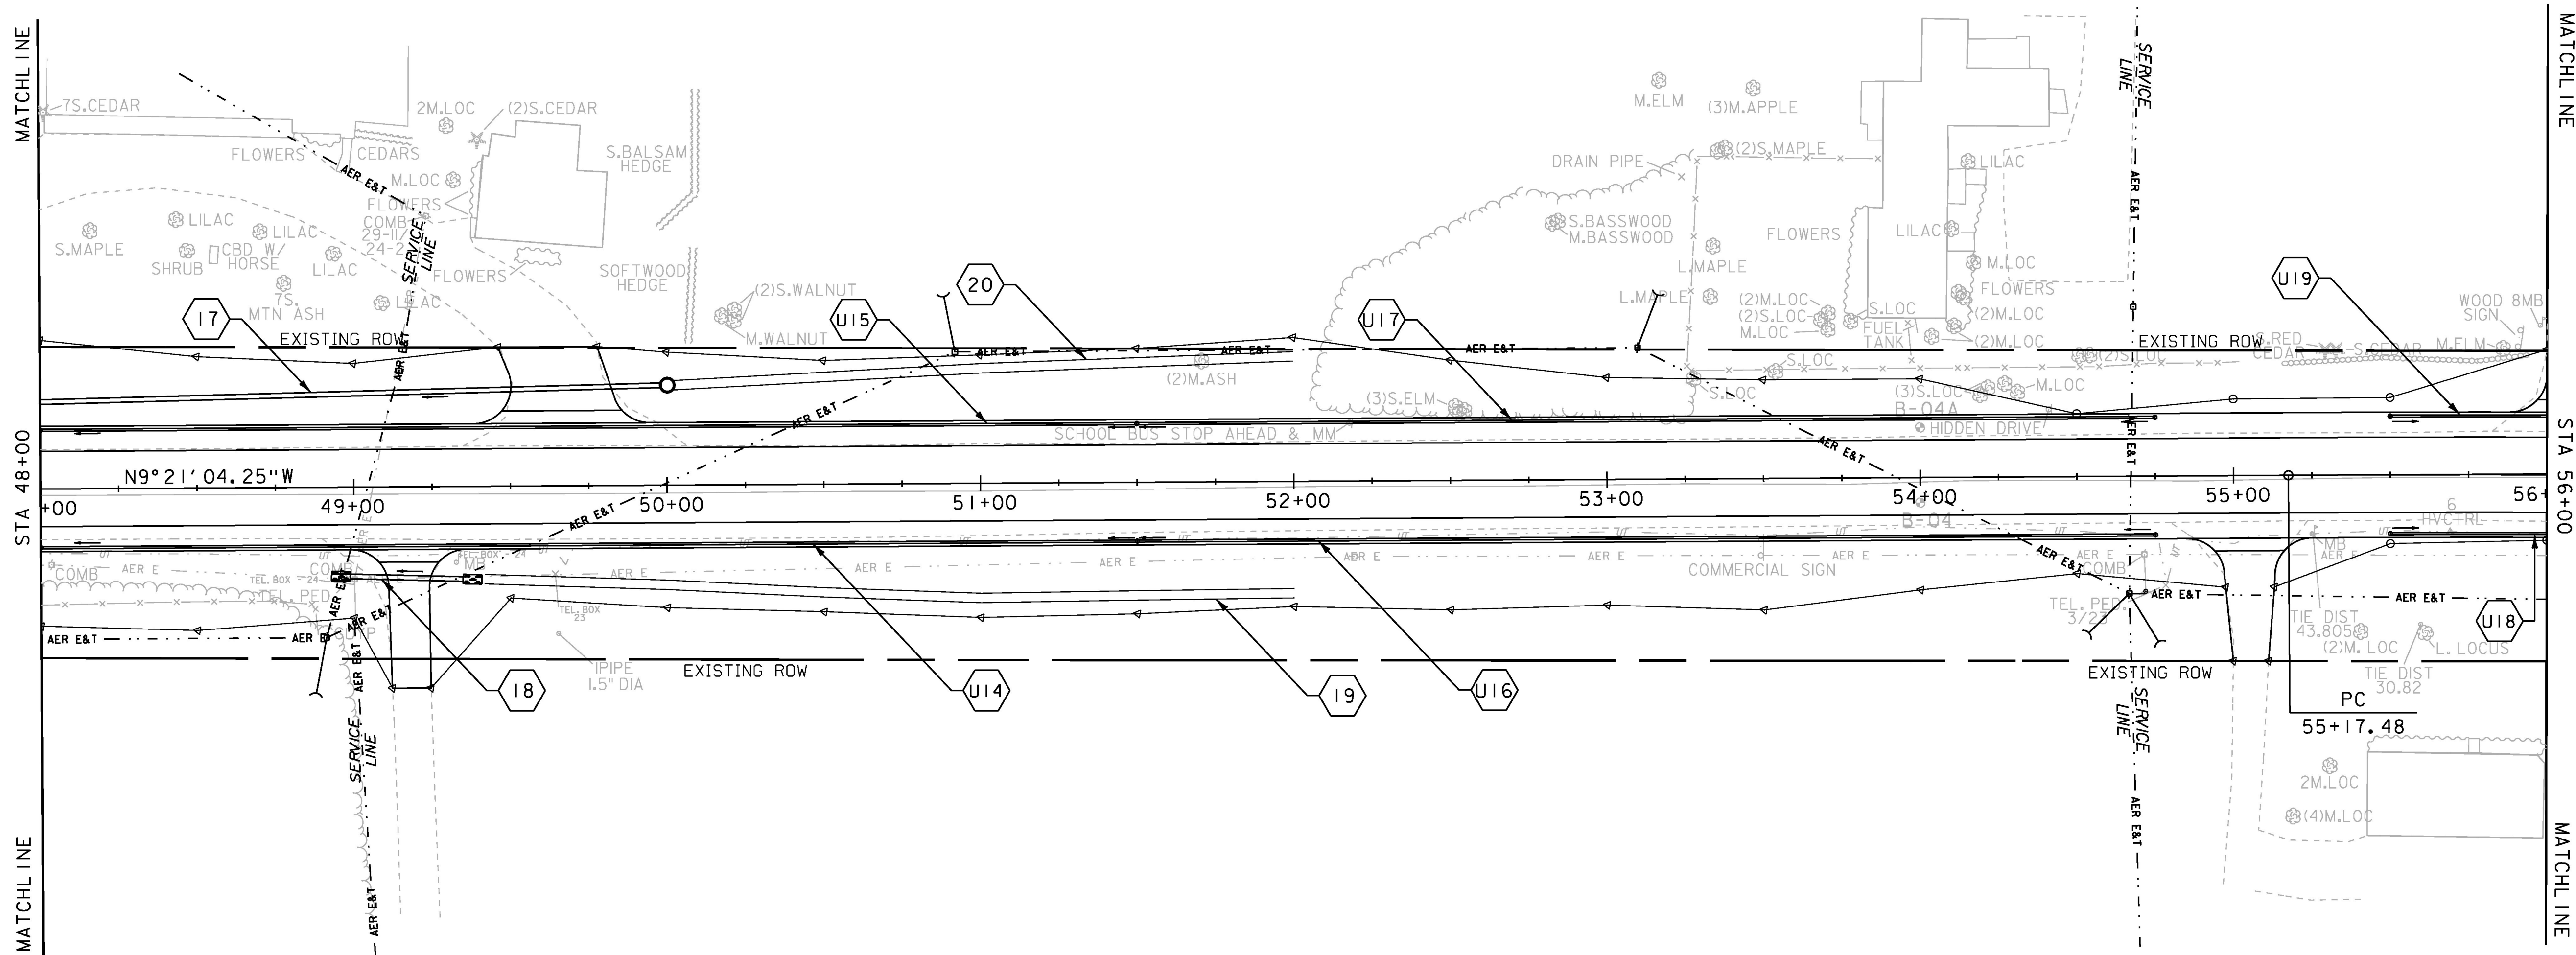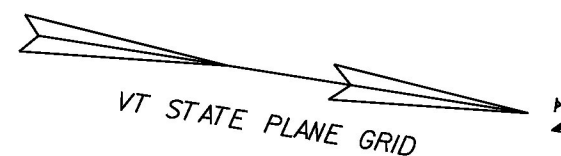


NEW DRAINAGE

- 17 STA 48+00 - 49+99 LT
NEW 18" X 200' CPEP
NEW PRCCB W/TYPE B GRATE (2)
- 18 STA 48+99 - 49+35 RT
NEW 18" X 36' CPEP
W/STONE PAD AT INLET & OUTLET
- 19 STA 49+41 - 52+00 RT
CONSTRUCT GRASS LINED TREATMENT SWALE
SEE GRASS LINED TREATMENT SWALE DETAILS
- 20 STA 50+00 - 52+00 LT
CONSTRUCT GRASS LINED TREATMENT SWALE
SEE GRASS LINED TREATMENT SWALE DETAILS

8-INCH UNDERDRAIN

- U14 STA 48+00 - 51+50 RT
NEW 8" X 350' UNDERDRAIN
W/FLUSHING BASIN AT 51+50 RT
- U15 STA 48+00 - 51+50 LT
NEW 8" X 350' UNDERDRAIN
W/FLUSHING BASIN AT 51+50 LT
- U16 STA 51+50 - 54+75 RT
NEW 8" X 325' UNDERDRAIN
W/FLUSHING BASIN AT 54+75 RT
- U17 STA 51+50 - 54+75 LT
NEW 8" X 325' UNDERDRAIN
W/FLUSHING BASIN AT 54+75 LT
- U18 STA 55+50 - 56+00 RT
NEW 8" X 50' UNDERDRAIN
W/FLUSHING BASIN AT 55+50 RT
- U19 STA 55+50 - 56+00 LT
NEW 8" X 50' UNDERDRAIN
W/FLUSHING BASIN AT 55+50 LT

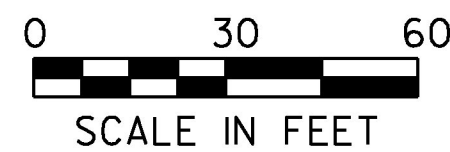

PROJECT NAME: CHARLOTTE	
PROJECT NUMBER: F EGC 019-4(20)	
FILE NAME: d78d062_nul_bdr.dgn	PLOT DATE: 15-MAR-2016
PROJECT LEADER: K. UPMAL	DRAWN BY: B. KIPP
DESIGNED BY: B. KIPP	CHECKED BY: C. LEACH
PLAN SHEET 6	SHEET 73 OF 499